


MOUSE TRAPTM

Operation and Service
Manual
3rd Edition




MOUSE TRAP™
Operation and Service Manual
3rd Edition

(c) 1981 Exidy, Inc.
390 Java Drive, Sunnyvale, California 94086-1271
Telephone: (408) 734-9410
Toll-free: (800) 538-8402
Telex: 357-499

INTRODUCING THE EXIDY OPERATOR CONVENIENCE PACKAGE

Exidy's New Operator Convenience Package makes all components accessible through the front of the game. Each door has its own sepa-

rate lock and key, securing game service to **capable** hands, and **profits** to the **right** hands!

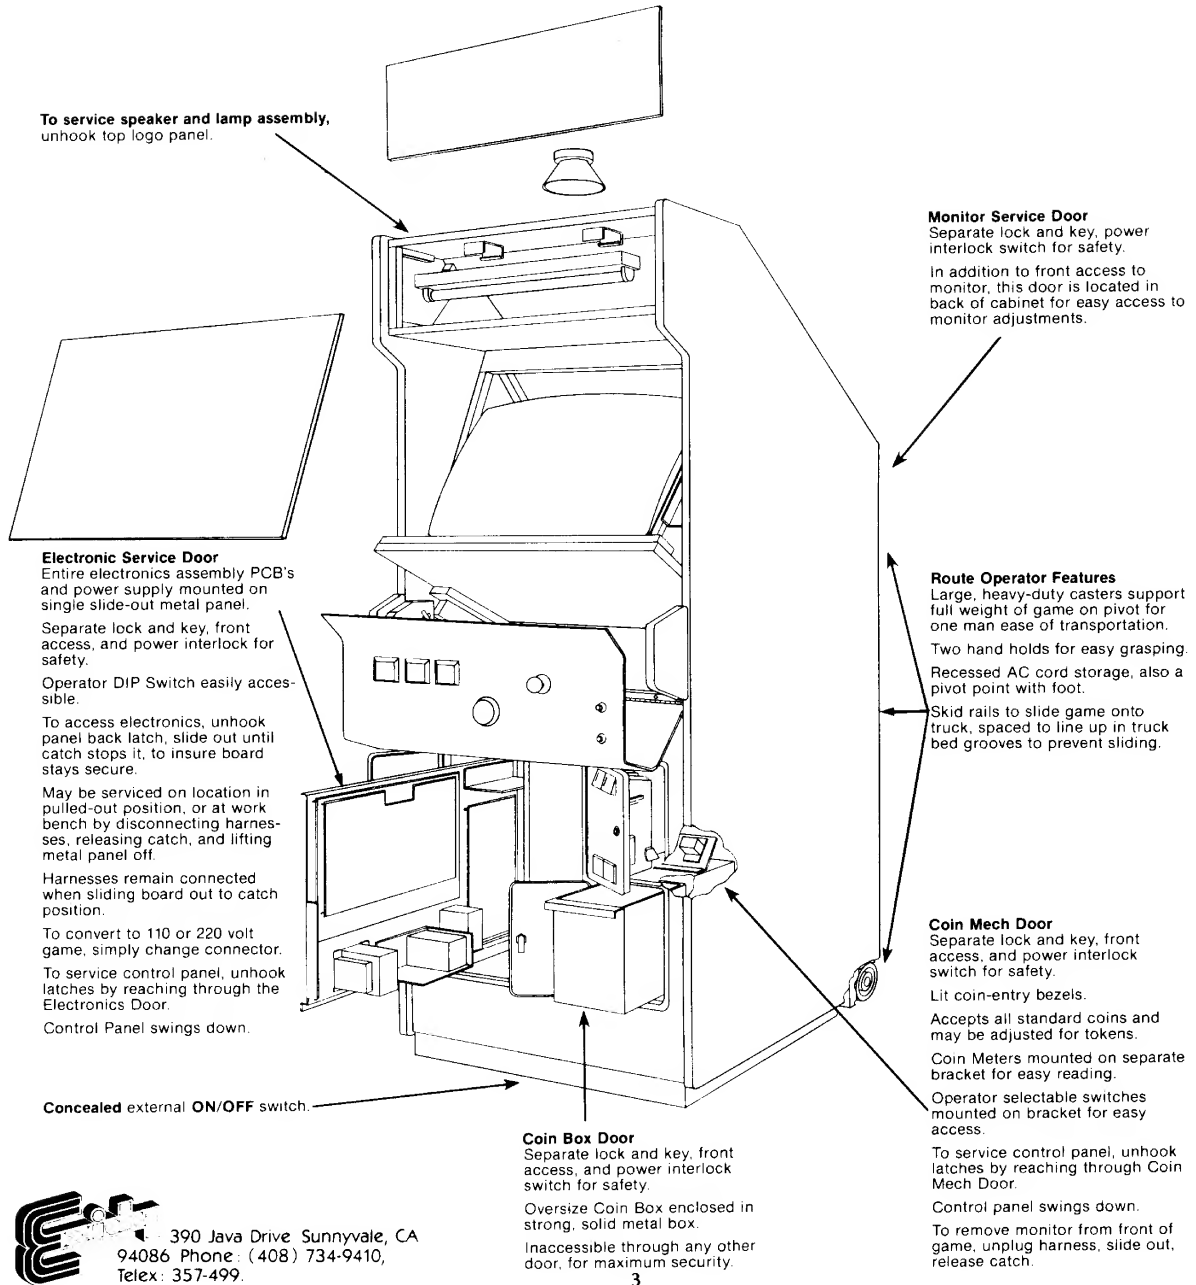

390 Java Drive, Sunnyvale, CA
94086 Phone: (408) 734-9410,
Telex: 357-499.

2.0 ADJUSTMENTS

2.1 POWER SUPPLY ADJUSTMENTS

All DC Power required to operate MOUSE TRAP™ is supplied by the Exidy Power Supply Module.

CAUTION: Only certified technicians should make adjustments on all components of MOUSE TRAP™. AC line voltage selection is available in your MOUSE TRAP™ game by setting the appropriate jumpers on the power chassis. Only the +5v DC is adjustable. This must be adjusted to:


+5.00v DC +/- .25v

as measured on the Logic PCB near the microprocessor (location 2A).

2.2 SELECTABLE OPTIONS

MOUSE TRAP™ has several switch selectable options controlled by an 8-position DIP switch located on the main logic board at position 16A. This switch is accessible through the front electronics door. Simply slide the logic board out and locate the DIP switch on the lower left-hand corner.

The following drawing shows the particular functions controlled by the 8-position DIP switch.

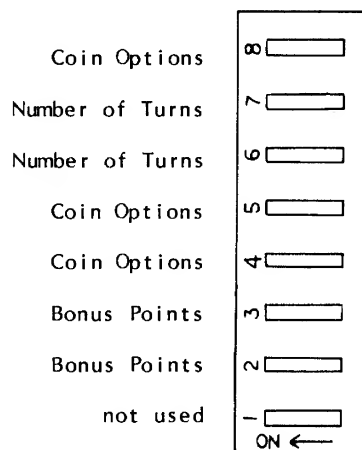

Functions of the 8-position DIP Switch

2.3 SELECTABLE DIP SWITCH SETTINGS

MOUSE TRAP™ is shipped with the dip switch already set for optimum dollar return. Should you decide to change the settings, you may select any of the following options by setting the proper switch accordingly:


A. COINAGE	Switch 4	Switch 5	Switch 8
1 Coin - 1 Credit	OFF	OFF	OFF
2 Coins- 1 Credit	OFF	ON	OFF
1 Coin - 2 Credits	ON	OFF	OFF
1 Coin - 4 Credits	ON	ON	OFF
1 Coin - 3 Credits or 2 Coins- 7 Credits	OFF	ON	ON
1 Coin in Left Slot- 1 Credit 1 Coin in Right Slot- 5 Credits	OFF	OFF	ON
One Coin in Left Slot- 1 Credit 1 Coin in Right Slot- 4 Credits	ON	OFF	ON
Two Coins in Left Slot- 1 Credit 1 Coin in Right Slot- 3 Credits	ON	ON	ON

B. NUMBER OF TURNS	Switch 6	Switch 7
2 turns	OFF	OFF
3 turns	ON	OFF
4 turns	OFF	ON
5 turns	ON	ON

E. BONUS TURN (Extra turn awarded when selectable number of points are made).	Switch 2	Switch 3
Extra turn for 30,000 points	OFF	OFF
40,000	ON	OFF
50,000	OFF	ON
60,000	ON	ON

2.4 AUDIO BOARD ADJUSTMENTS

The illustration that follows points out the four audio adjustments and the location of the DIP switch. The audio board rides piggyback on the logic board, mounted on the left wall of the game, when viewed from the front service door.

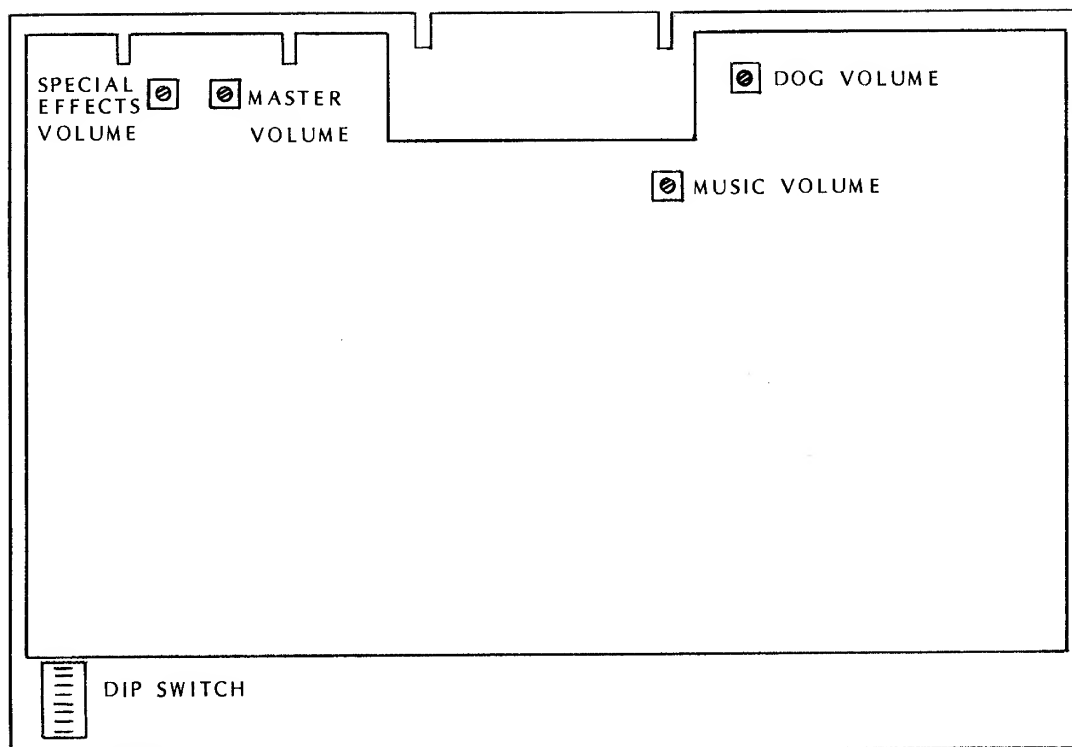

3.0 SELF DIAGNOSTIC TESTS

MOUSE TRAPTM has two diagnostic test modes. The first mode, the Logic/Audio Diagnostic Test Mode, checks the RAM and ROM chips on the Logic Board, and simultaneously checks the Audio Board. This test mode is the normal self-test mode and is automatically performed when MOUSE TRAPTM is first turned on. The second mode tests the Controls and Color only. To run this test, activate the coin switch while powering up. We will explain both of these modes in full detail.

You may bypass both diagnostic modes by depressing either player one or player two start button while powering up. After 8 seconds of the message "STAND BY VERSION X", (where X is a number) the Attract Mode appears.

3.1 LOGIC/AUDIO DIAGNOSTIC TEST MODE

The RAM Test

When MOUSE TRAPTM is first turned on, a processor and video RAM test is done. If the RAM passes, it goes immediately into the ROM test, without a message indicating it passed the RAM test.

If a RAM chip fails, an attempt is made to indicate the RAM chip where a failure was detected. Since the screen depends on a properly functioning RAM, this indication may not be displayed. A failed RAM may be indicated by a digit from 0 to 7 in every position on the screen using four colors. The code for these digits is as follows:

Number on Screen	RAM chip to check	
0	5A	Processor RAM failure
1	4A	
2	8B	Screen RAM failure
3	7B	
4	11C	Video RAM failure
5	13C	
6	12C	
7	14C	

The RAM test cycles if the failure is persistent.

The ROM Test

If the RAM test passes, the ROM test begins. The message STAND BY VERSION X appears on the screen (where X is a number). One by one, exclamation points (!) appear on the screen. Each exclamation mark indicates half (2K) of a ROM board chip, numbered 6A through 13A, has passed the diagnostic test. After all marks appear, the game then goes into the Attract Mode, indicating all is well.

If any failure is detected during the ROM test, a hex digit appears instead of an exclamation point with a "BAD ROM" message at the top of the screen. The test repeats indefinitely if a bad ROM is encountered. The key for which chip to check is as follows:

Message: ROM Chip to check:

0	lower 2K of 11A
1	upper 2K of 11A
2	lower 2K of 10A
3	upper 2K of 10A
4	lower 2K of 9A
5	upper 2K of 9A
6	lower 2K of 8A
7	upper 2K of 8A
8	lower 2K of 7A
9	upper 2K of 7A
A	lower 2K of 6A
B	upper 2K of 6A

The Audio Test

While the Logic tests are underway, the Audio board is also being checked.

Five seconds after power on, one or more quick beeps, like an organ chord, are heard. This is part of the Exidy Audio Diagnostic Test. The number of beeps that sound indicate different conditions of the Audio board.

The following code is an indication **only**, of where to first check the Audio Board. Because this diagnostic test only evaluates certain components, other circuitry is relied upon for the test. Should this other circuitry fail, the diagnostic test may not, then, point directly to the failure. Please use the results of this test as a guideline for further troubleshooting.

The code is as follows:

- 0 beep: If no beeps are heard, along with a hum or random notes, this may indicate a failure in 3A and/or 7A.
- 1 beep: All audio hardware is OK. However, be sure to check the Attract Mode Cycle anyway for a possible message to check the Audio Board. In occasional instances, this can occur. The message will further direct you.
- 2 beeps: ZERO PAGE RAM failure. Check 6532 RAM I.O. Timer Array at location 7B on the board.
- 3 beeps: (will not occur)
- 4 beeps: ROM failure
- 5 beeps: INTERRUPT failure. Check 6532 at location 7B.

In addition, this message appears during power up **only** if the Audio Board needs to be checked:

AUDIO SELF TEST ERROR


or

AUDIO COMMUNICATION ERROR

3.2 CONTROL AND COLOR TEST MODE

If desired, you may test all player controls and screen colors. To do so, activate either coin switch at power-up. The game then enters the Control/Color Test Mode. This mode lasts for seven minutes to give you time to test and make adjustments. After that, the Attract Mode begins.

In the Control/Color Test Mode, the screen shows this pattern:

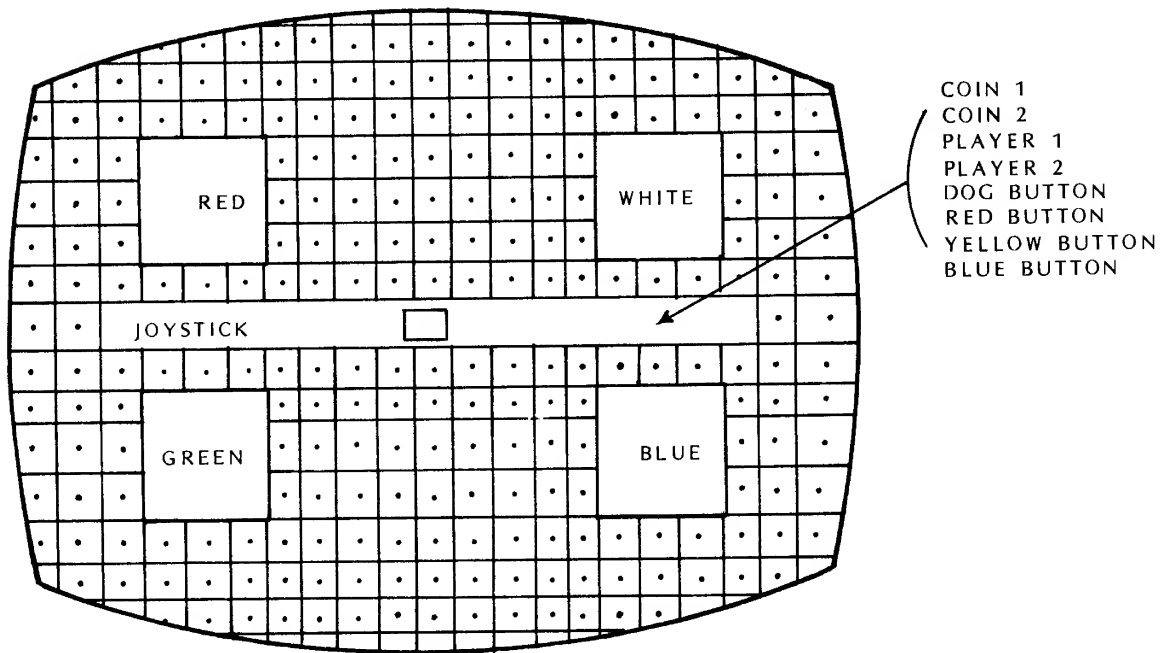

The grid pattern tests your screen for any distortion or convergence.

The solid blocks of color (red, white, green, and blue) allow you to adjust the color. When any player control (player 1 start, player 2 start, or red, blue, yellow, or Dog button) or coin switch (coin 1 or coin 2) is activated, its name appears below the white box. This shows that the switch connection is proper. When the joystick is activated, the message Joystick appears below the red box. Also, in the middle of the screen, a square indicates the joystick direction.

4.0 NORMAL OPERATION

4.1 ATTRACT MODE

After the MOUSE TRAPTM is powered up and the self- diagnostic test is performed, the Attract Mode starts up, showing the following messages:

MOUSETRAPTM

CREDITS 00

ONE COIN FOR ONE CREDIT

ONE CREDIT FOR ONE PLAYER
TWO CREDITS FOR TWO PLAYERS

EXIDY

(P) COPYRIGHT 1981 (C)

The number of coins or any currency per game is operator selectable and the message will reflect that choice.

MOUSETRAP HALL OF FAME

LWH	49720	INCREDIBLE
DJS	47340	FABULOUS
VIC	44130	GREAT
MRK	37830	SUPER
HAI	25650	GOOD

JOIN THE MOUSETRAP HALL OF FAME
BY ENTERING YOUR INITIALS
FOR A HIGH SCORE

At power up, this Hall of Fame contains fictitious high scores. The first player to exceed the lowest score may enter his score and initials. The Hall of Fame will show the high player's score until power is turned off, and then the fictitious scores reappear.

The following game instructions appear, in pictorial form:

MOUSE EATS CHEESE, BONES, TREASURES

DOG EATS CAT, CHEESE, BONES, TREASURES

CAT EATS MOUSE

HAWK EATS MOUSE AND DOG

IN MAKES HAWK STUPID

BONE TURNS MOUSE INTO DOG
WHEN YOU USE THE DOG BUTTON

A few seconds of game play is then shown and the Attract Mode cycle begins again.

4.2 Game Play

Despite many cats on the prowl, the player steers a mouse through a playfield of halls where the mouse chomps cheese for points and finds other red prizes for bonus value.

The mouse searches out dog bones which are accumulated at the top of the screen. Each bone allows the mouse to become a ferocious dog when the "dog button" on the control panel is pressed. Now the player is the aggressor, and cats are open game for additional points of escalating value. After several seconds, the red dog begins blinking blue. This warns that his power is wearing off and he'll soon be a mere mouse again.

When all the cheese morsels on one level are eaten up, the player is given another game field with more challenge.

Randomly, a purple hawk flies over the walls in search of a delicious mouse or dog. The player's only defense is to enter the secret passage marked "in" at the center of the screen. This quickly transports the mouse or dog through an unseen tunnel to one of the four corners. This tactic makes the hawk "dumb", or aimless in his flight. The mouse or dog can then escape the hawk.

The player has the added strategy of doors to open and shut to his advantage. At the touch of a button, the player may open or close three colors of doors. By closing a door, the mouse can block a cat's advance. Or, when the mouse turns into a dog, the skilled player can use the doors to trap cats, earning additional points of escalating value for each one overtaken.

4.3 BONUS TURN FEATURE

An extra turn is given to a player everytime he scores 30,000, 40,000, 50,000, or 60,000 (operator selectable) points. A good player may rack up any number of bonus turns throughout a game, but the screen does not display more than five.

4.4 ENTERING THE MOUSE TRAP™ HALL OF FAME

Anytime a player's score exceeds one of the five current high scores, he is eligible to enter his initials in the Vanity Table. If both players of a two player game are record high scorers, the highest of the two is first invited to enter his initials. To do so, he directs the mouse around an alphabet chart with the joystick. Once on the letter desired, he hits the DOG button. The RUB feature allows a player to erase mistaken letters. Once the correct initials are keyed in, the player should go to END, and hit the DOG button. This will log in his initials, and return to the next mode.

The Hall of Fame Mode runs on a timer. If a player does not enter his or her initials, the Attract Mode eventually takes over.

LOGIC BOARD ASSEMBLY PARTS LIST

PART NUMBER	DESCRIPTION
177-3391-14	Logic PCB Assembly
77-3391-14	Logic PCB
58-0002-00	Spacer
100-0005-00	Ribbon Cable Assembly
22-0001-02	I.C. 74LS00
22-0002-02	I.C. 74LS02
22-0003-02	I.C. 74LS04
22-0004-00	I.C. 7407
22-0005-02	I.C. 74LS08
22-0006-02	I.C. 74LS11
22-0007-02	I.C. 74LS20
22-0008-02	I.C. 74LS21
22-0009-02	I.C. 74LS27
22-0010-02	I.C. 74LS32
22-0011-02	I.C. 74LS74
22-0012-02	I.C. 74LS112
22-0013-02	I.C. 74LS138
22-0214-02	I.C. 74LS139
22-0015-02	I.C. 74LS157
22-0016-02	I.C. 74LS161
22-0017-02	I.C. 74LS166
22-0018-02	I.C. 74LS193
22-0019-02	I.C. 74LS241
22-0020-02	I.C. 74LS245
22-0021-02	I.C. 74LS374
25-0001-00	I.C. MICROPROCESSOR 6502 A
23-0001-00	6301 PROM
23-0002-00	6331 PROM
23-0003-00	6331 PROM
20-0001-00	IN4002 DIODE
02-4712-00	RESISTOR, 470 OHM 1/4W 5%
02-1222-00	RESISTOR, 1.2K 1/4W 5%
02-2222-00	RESISTOR, 2.2K 1/4W 5%
02-3322-00	RESISTOR, 3.3K 1/4W 5%
09-2212-00	RESISTOR, 220 OHM 1/8W 5% 10 PIN SIP
09-2222-00	REISTOR, 2.2K 1/8W 5% 10 PIN SIP
09-4722-00	RESISTOR, 4.7K 1/8W 5% 10 PIN SIP
09-6822-00	RESISTOR, 6.8K 1/8W 5% 10 PIN SIP
10-1034-1	CAPACITOR, .01 UF CERAMIC DISC
10-1044-1	CAPACITOR, .1 UF CERAMIC DISC
11-6853-0	CAPACITOR, 6.8 UF 25V DIPTANT
13-4775-0	CAPACITOR, 470UF 10V ELECTROLYTIC
47-0001-00	DIPSHUNT JUMPER PAKS 16 PIN
49-5002-00	DIP SWITCH 8 POSITION
29-0001-00	CRYSTAL 11.289MHZ (SERIES)
44-1601-00	DIP SOCKETS 16 PIN LOW PROFILE
44-2401-00	DIP SOCKETS 24 PIN LOW PROFILE
44-4001-00	DIPSOCKETS 40 PIN LOW PROFILE
44-1401-00	DIP SOCKETS 14 PIN LOW PROFILE
44-1801-00	DIP SOCKETS 18 PIN LOW PROFILE
11-1053-00	CAPACITOR 1UF 25V DIPTANT
02-2212-00	RESISTOR, 220 OHM 1/4W 5%

LOGIC BOARD ASSEMBLY PARTS LIST (continued)

PART NUMBER	DESCRIPTION
02-1802-00	RESISTOR, 18 OHM 1/4W 5%
10-3314-4	CAPACITOR, 330PF CERAMIC DISC
02-4732-00	RESISTOR, 47K
11-1063-00	10UF 16V DIPTANT
23-0004-00	2732, EPROM
23-0005-00	2716, EPROM
23-0006-00	2114 STATIC RAM
02-1822-00	RESISTOR, 1.8K 1/4W 5%
02-2272-00	RESISTOR, 2.7K 1/4W 5%
02-1052-00	RESISTOR, 1M 1/4W 5%
27-0003-00	I.C., OSC NE555
20-0006-00	DIODE, 4454
23-0014-00	2732, EPROM
23-0015-00	2732, EPROM
23-0016-00	2732, EPROM
23-0017-00	2732, EPROM
23-0018-00	2732, EPROM

AUDIO/COLOR BOARD ASSEMBLY


PART NUMBER	DESCRIPTION
177-3392-14	AUDIO/COLOR PCB ASSEMBLY
77-3392-14	AUDIO/COLOR PCB
22-0013-00	I.C. 74LS138
26-0001-00	I.C. 6520-A
22-0023-00	I.C. 4069
22-0003-02	I.C. 74LS04
22-0001-02	I.C. 74LS00
22-0021-02	I.C. 74LS374
22-0024-00	I.C. 4053
22-0025-00	I.C. 4175
22-0011-02	I.C. 74LS74
22-0026-00	I.C. LM324
22-0027-02	I.C. 74LS86
22-0028-00	I.C. 4051
22-0014-02	I.C. 74LS139
22-0029-02	I.C. 74LS148
22-0030-02	I.C. 74LS151
22-0031-02	I.C. 74LS174
10-1044-1	CAPACITOR, .1 UF CERAMIC
10-2204-1	CAPACITOR, 22PF 16V CERAMIC
10-1034-1	CAPACITOR, .01UF 16V CERAMIC
13-3365-1	CAPACITOR, 33UF 25V ELECTROLYTIC
13-1075-00	CAPACITOR, 100UF 16V ELECTROLYTIC
13-4755-00	CAPACITOR, 4.7UF 16V ELECTROLYTIC
02-3332-00	RESISTOR, 33K 1/4W 5%
02-3322-00	RESISTOR, 3.3K 1/4W 5%
02-1062-00	RESISTOR, 10M 1/4W 5%
02-3012-00	RESISTOR, 300 OHM 1/4W 5%
02-1802-00	RESISTOR, 18 1/4W 5%
02-2232-00	RESISTOR, 22K 1/4W 5%
02-2722-00	RESISTOR, 2.7K 1/4W 5%


AUDIO/COLOR BOARD ASSEMBLY (continued)


PART NUMBER	DESCRIPTION
02-1322-00	RESISTOR, 1.3K 1/4W 5%
02-6812-00	RESISTOR, 680 OHM 1/4W 5%
02-3312-00	RESISTOR, 330 OHM 1/4W 5%
02-1612-00	RESISTOR, 160 OHM 1/4W 5%
02-8202-00	RESISTOR, 82 OHM 1/4W 5%
02-3902-00	RESISTOR, 39 OHM 1/4W 5%
02-1032-00	RESISTOR, 10K 1/4W 5%
07-1034-00	10K POT
29-0002-00	3.579545 MHZ CRYSTAL
47-0001-00	16 PIN DIP SHUNT
44-1401-00	14 PIN DIP SOCKET
44-2401-00	24 PIN DIP SOCKET
44-2801-00	28 PIN DIP SOCKET
44-4001-00	40 PIN DIP SOCKET
44-1601-00	16 PIN DIP SOCKET
02-4712-00	RESISTOR, 470 OHM 1/4
02-2422-00	RESISTOR, 2.4K 1/4W
02-2032-00	RESISTOR, 20K 1/4W
02-1832-00	RESISTOR, 18K 1/4W
02-3922-00	RESISTOR, 3.9K 1/4W
02-2452-00	RESISTOR, 2.4M 1/4W
22-0039-00	I.C. 74LS42
23-0007-00	2732 EPROM
23-0008-00	2732 EPROM
23-0009-00	2732 EPROM
10-2034-01	CAPACITOR .02 uf CER.
23-0010-00	2732 EPROM
27-0003-00	NE555 OSC.
22-0033-00	TL081 OP/AMP
27-0004-00	MC3417L DELTA MOD
22-0034-00	4006 CMOS SHIFT REG.
40-0003-00	6 PIN MALE CONNECTOR .156 CENTER
22-0037-00	I.C. 74LS125
22-0015-00	I.C. 74LS157
22-0010-00	I.C. 74LS32
22-0038-00	I.C. 74LS367
25-0003-00	Z80 CPU
22-0035-00	4070 CMOS EXC. OR GATE
22-0036-00	LM741EN OP/AMP
02-5643-01	RESISTOR, .560K OHM 1/4W
84-0014-00	HEATSINK, THM6045
14-2044-00	CAPACITOR, MYLAR .2UF 16V
10-1024-00	CAPACITOR, CERAMIC .001UF 16V
09-0001-00	RESISTOR, 1.8K SIP PAC 8 PIN
09-0002-00	RESISTOR, 4.7K SIP PAC 8 PIN
21-0001-00	NPN TRANSISTOR TIP 120
21-0002-00	PNP TRANSISTOR, TIP 125
10-5024-01	CAPACITOR, MYLAR .0022 UF
14-2224-00	CAPACITOR, MYLAR .0022 uf
23-0011-00	2716, EPROM
23-0012-00	2716, EPROM
23-0013-00	2716, EPROM

AUDIO/COLOR BOARD ASSEMBLY (continued)

PART NUMBER	DESCRIPTION
13-3355-01	CAPACITOR .33 uf 16V ELECTROLYTIC
40-0004-00	CONNECTOR, PCB MALE
25-0002-00	I.C. 6532
25-0004-00	I.C. 6502
27-0001-00	I.C. 6840
22-0022-02	I.C. 74LS154
27-0002-00	I.C. 8253

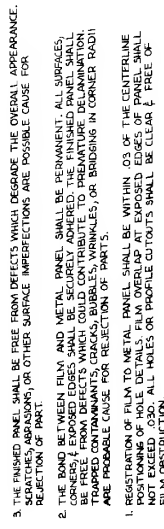





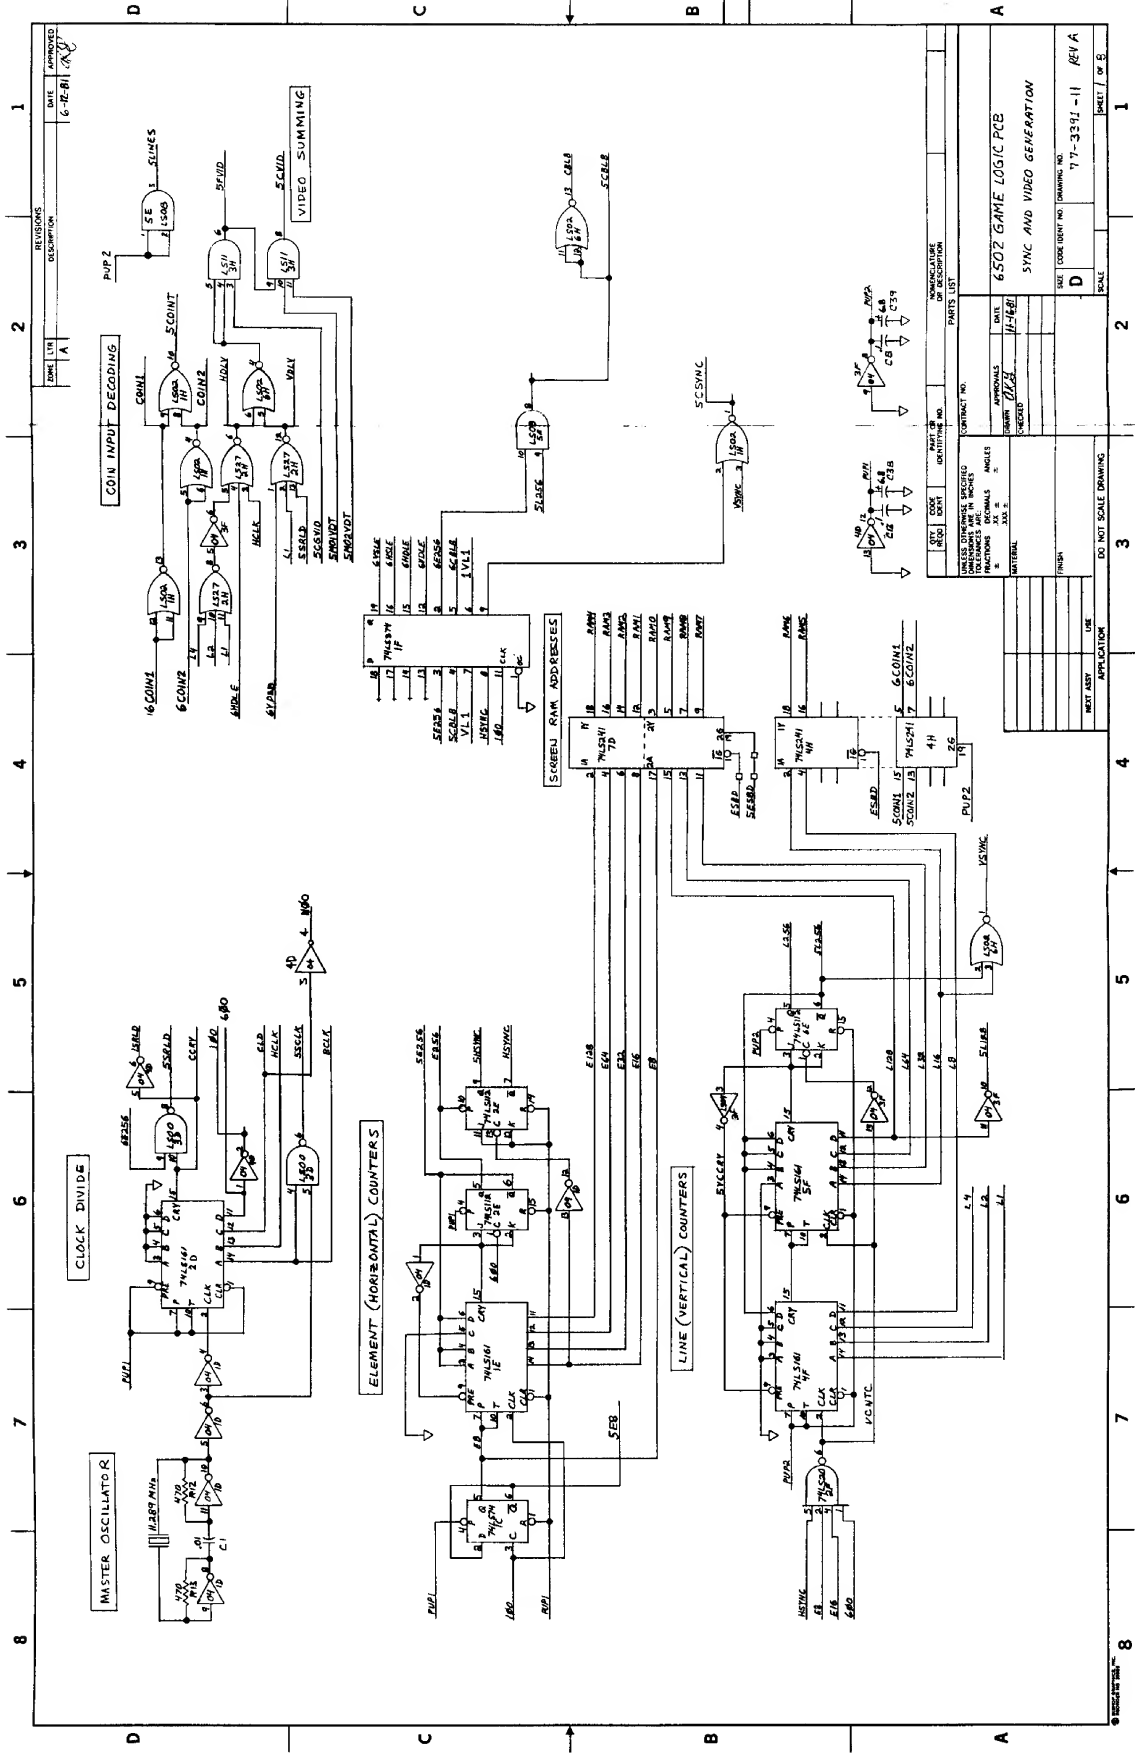

DATE	6-12-81	APPROVED	
DESIGNER	W. L. H.	REVISIONS	
DESCRIPTION	6502 GAME LOGIC PCB		

CONTRACT NO.	77-331-11	REV A	
DATE	11-1-81	SCALE	1
APPROVALS	DESIGNED BY: W. L. H. CHECKED BY: J. H. B.		
DESIGNED BY	W. L. H.	CHECKED BY	J. H. B.
MATERIAL	DO NOT SCALE DRAWING		
USE	APPLICATION		
TEST ASBY	DO NOT SCALE DRAWING		
1	2	3	4
5	6	7	8

SCREEN CHIP SELECT AND BUS DIRECTION DECODING FROM

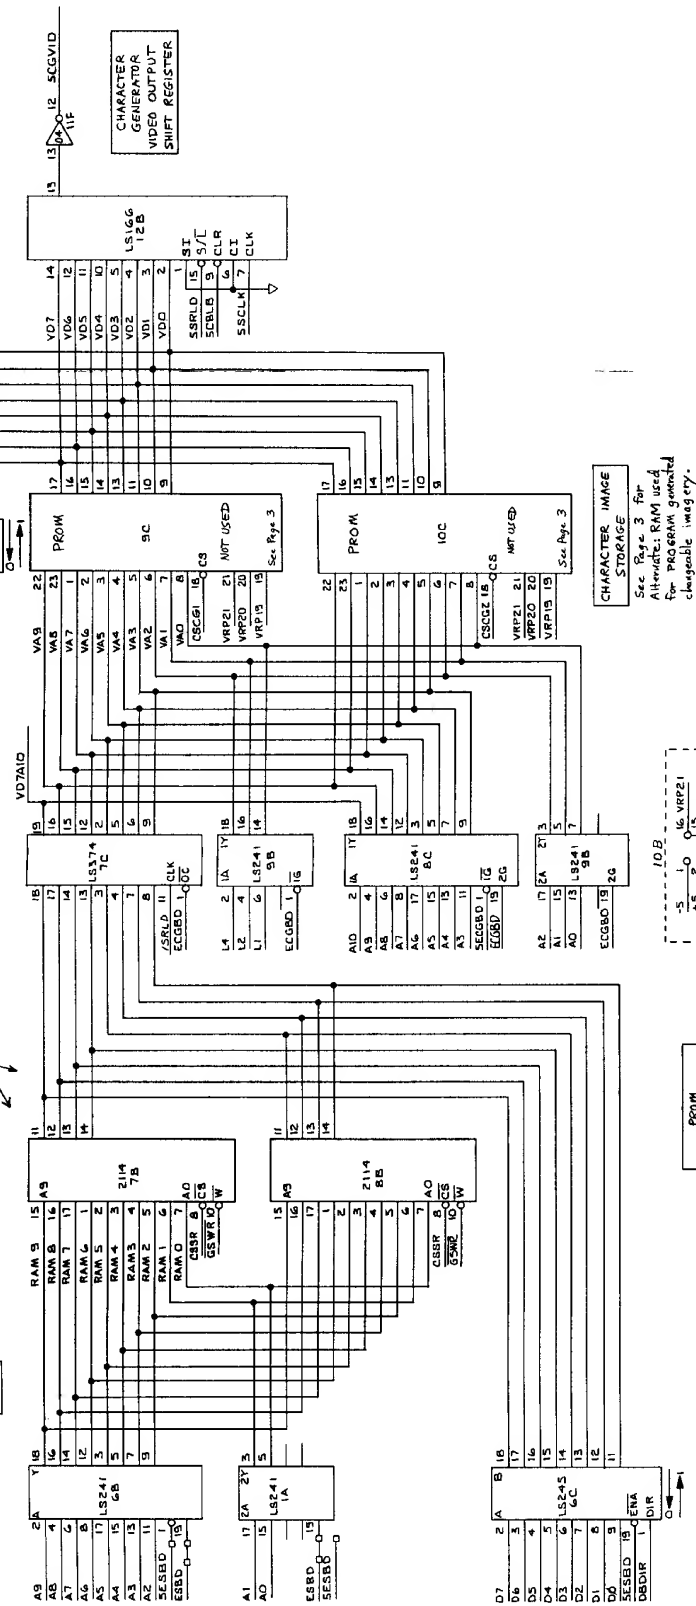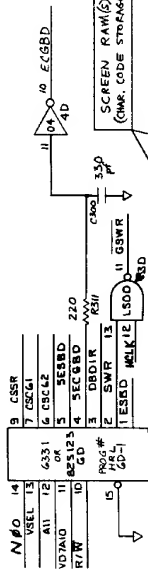

CHARACTER GENERATOR
IMAGE STORAGE RAMS


For use with PROGRAM
generated changeable images.
ALL 2114's \leq 300ns

VA9	15	11	VD7
VA8	16	12	VD6
VA7	17	13	VD5
VA6	1	14	VD4
VA5	2		
VA4	3	2114	
VA3	4	11C	
VA2	5		
VA1	6		
VA0	7		
CSCG1	8		
CSWR	10		

VA9	15	11	VD7
VA8	16	12	VD6
VA7	17	13	VD5
VA6	1	14	VD4
VA5	2		
VA4	3	2114	
VA3	4	11C	
VA2	5		
VA1	6		
VA0	7		
CSCG2	8		
CSWR	10		

VA9	15	11	VD3
VA8	16	12	VD2
VA7	17	13	VD1
VA6	1	14	VDD
VA5	2		
VA4	3	2114	
VA3	4	11C	
VA2	5		
VA1	6		
VA0	7		
CSCG1	8		
CSWR	10		




VA9	15	11	VD3
VA8	16	12	VD2
VA7	17	13	VD1
VA6	1	14	VDD
VA5	2		
VA4	3	2114	
VA3	4	11C	
VA2	5		
VA1	6		
VA0	7		
CSCG2	8		
CSWR	10		

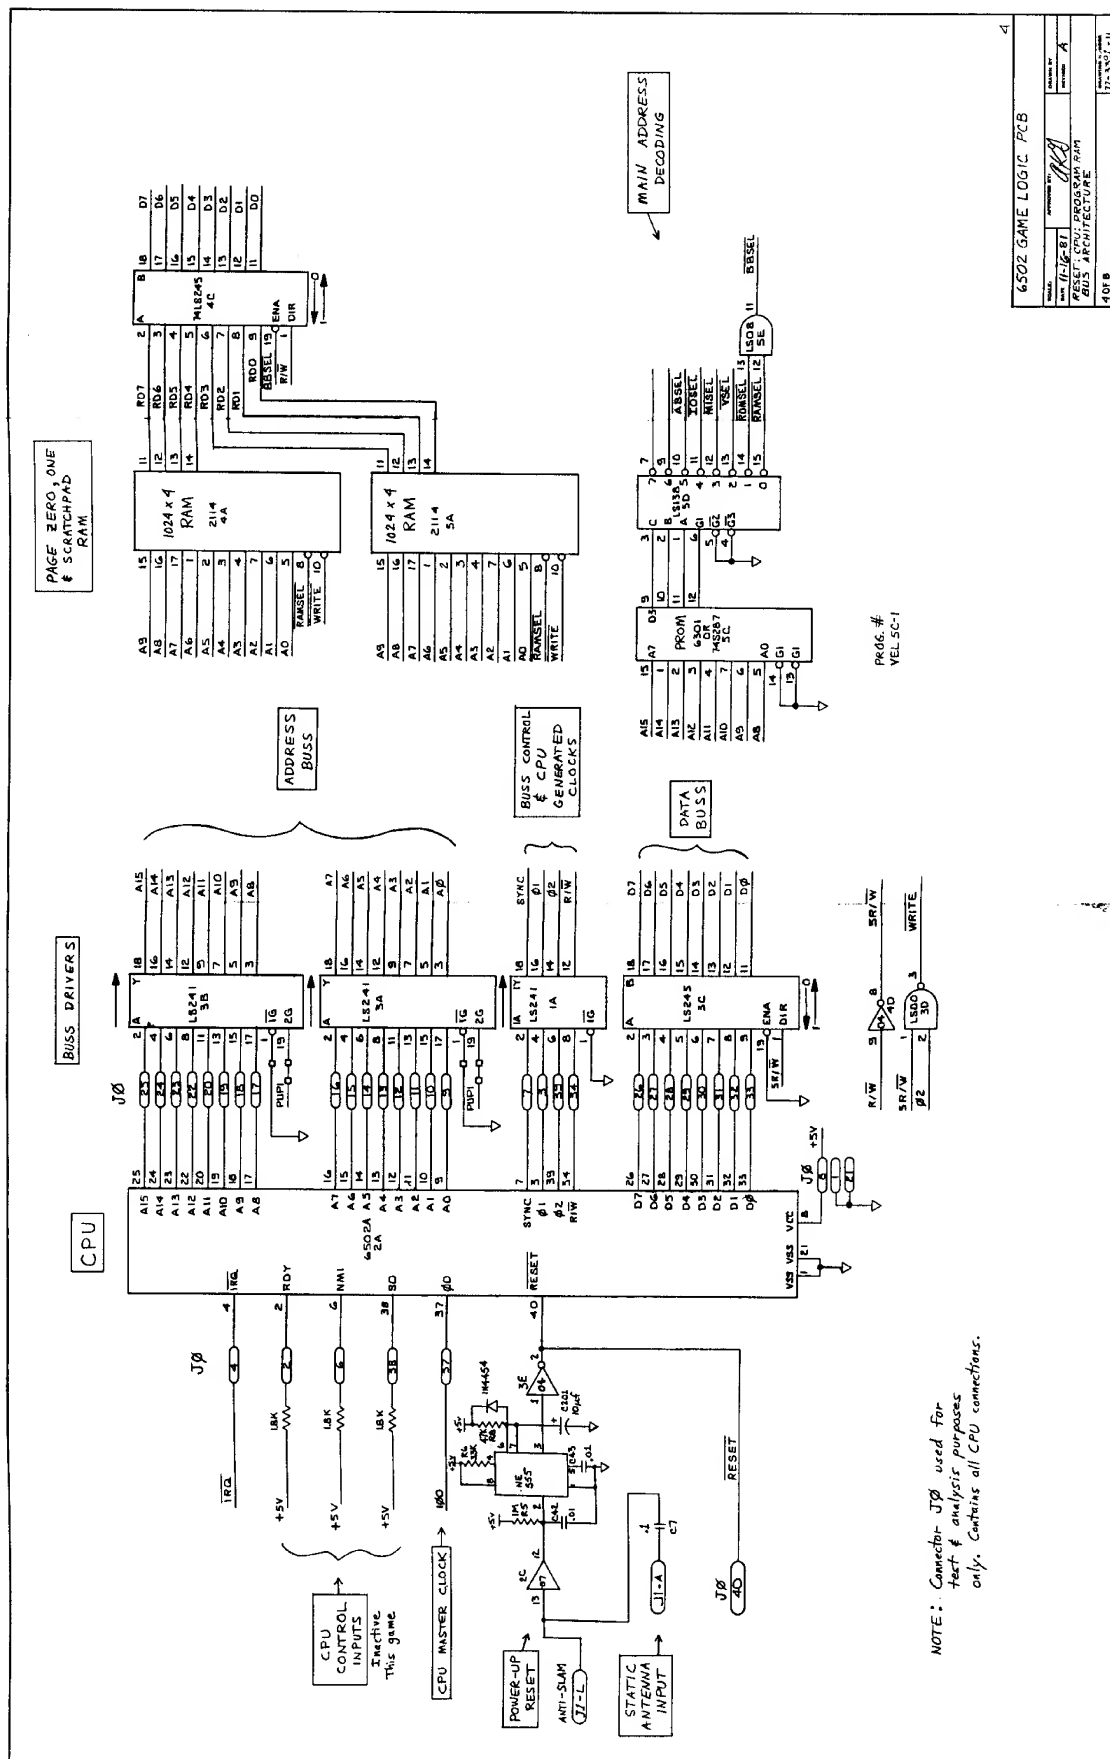

NOTE: Connector J0 used for test & analysis purposes only. Contains all CPU connections.


6502 GAME LOGIC PCB	
DATE: 11-16-81	DESIGNED BY: [Signature]
RESET: CPU PROGRAM RAM	
BUS ARCHITECTURE	
4018	17-332-11

See TECHNICAL MANUAL for PROGRAM #'s.




PROM ADDRESS SELECTION


**MEMORY DEVICE PERSONALITY
SELECTION**

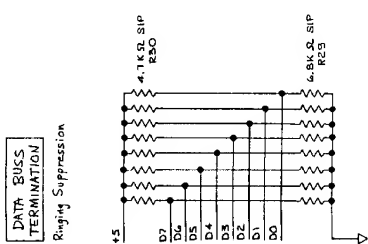



EXIDY INC.

50FB	6502 GAME LOGIC PCB CPU ROM	APPROVED BY <i>gk</i>	REVIEWED BY A
		DATE 11-16-81	
			REVIEWED 37-352-11

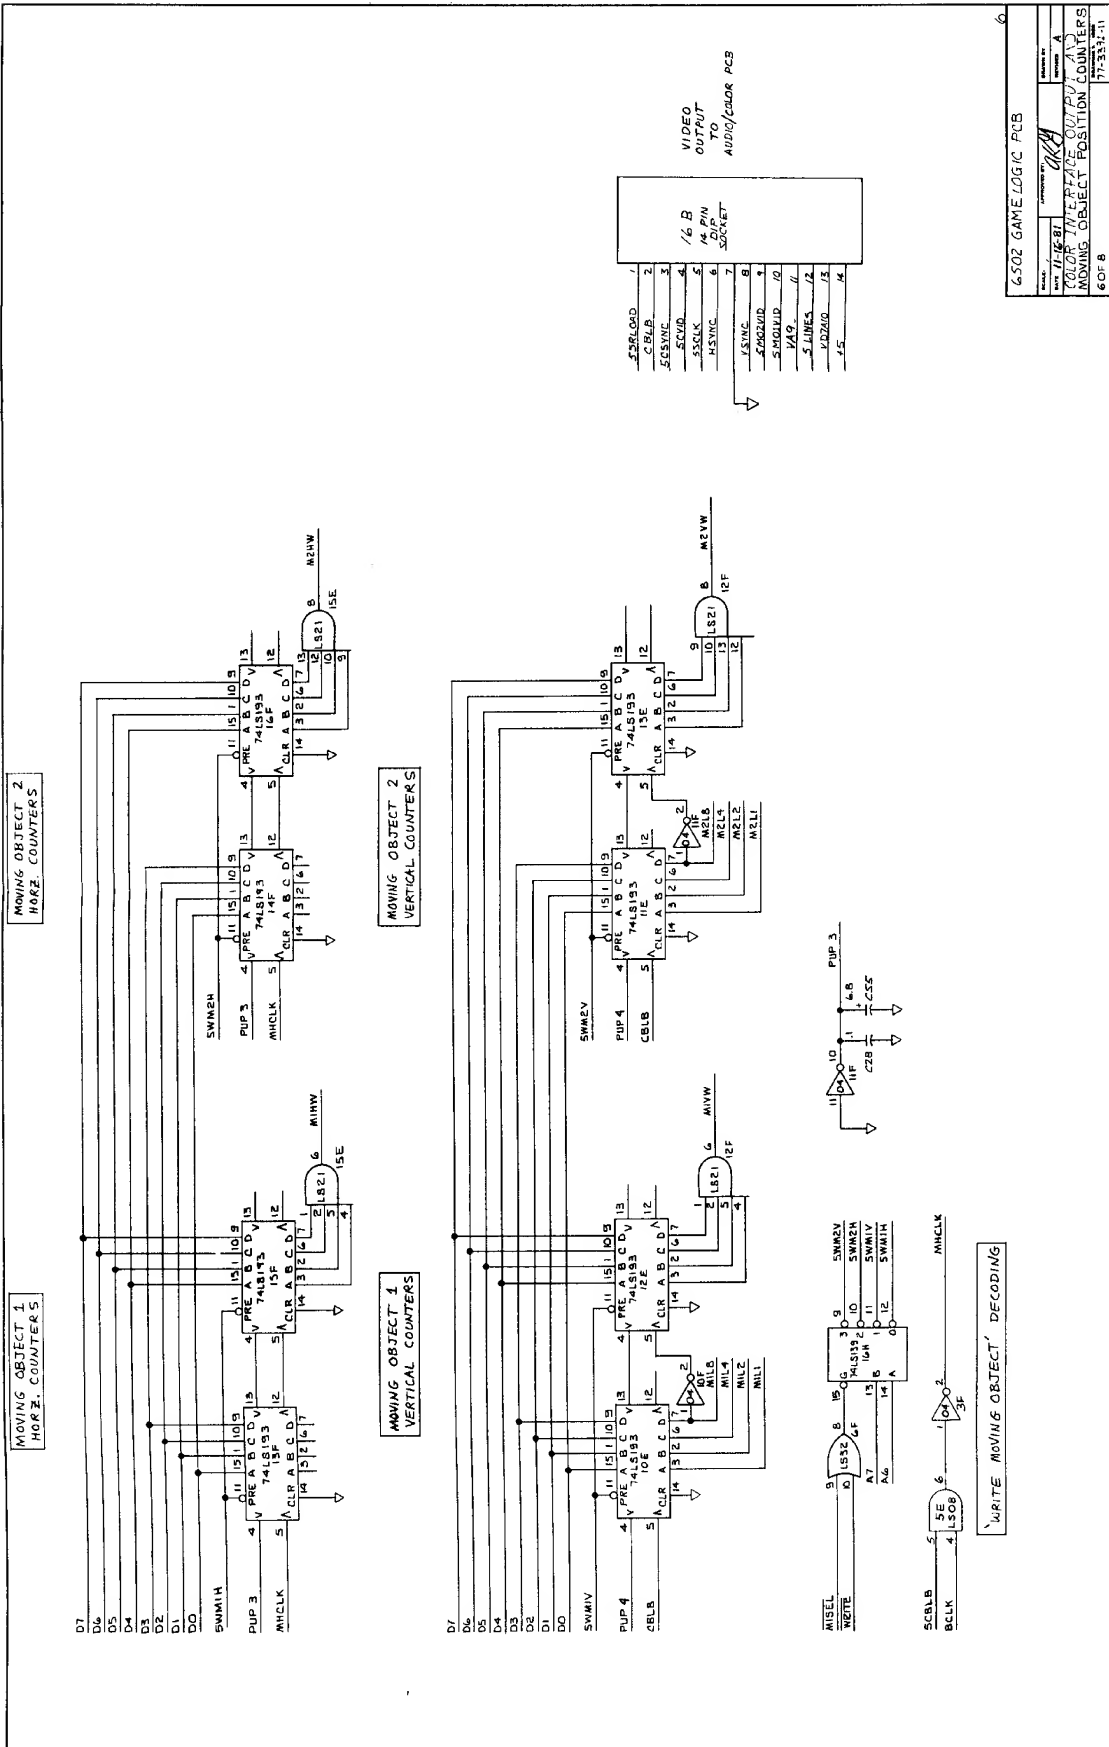

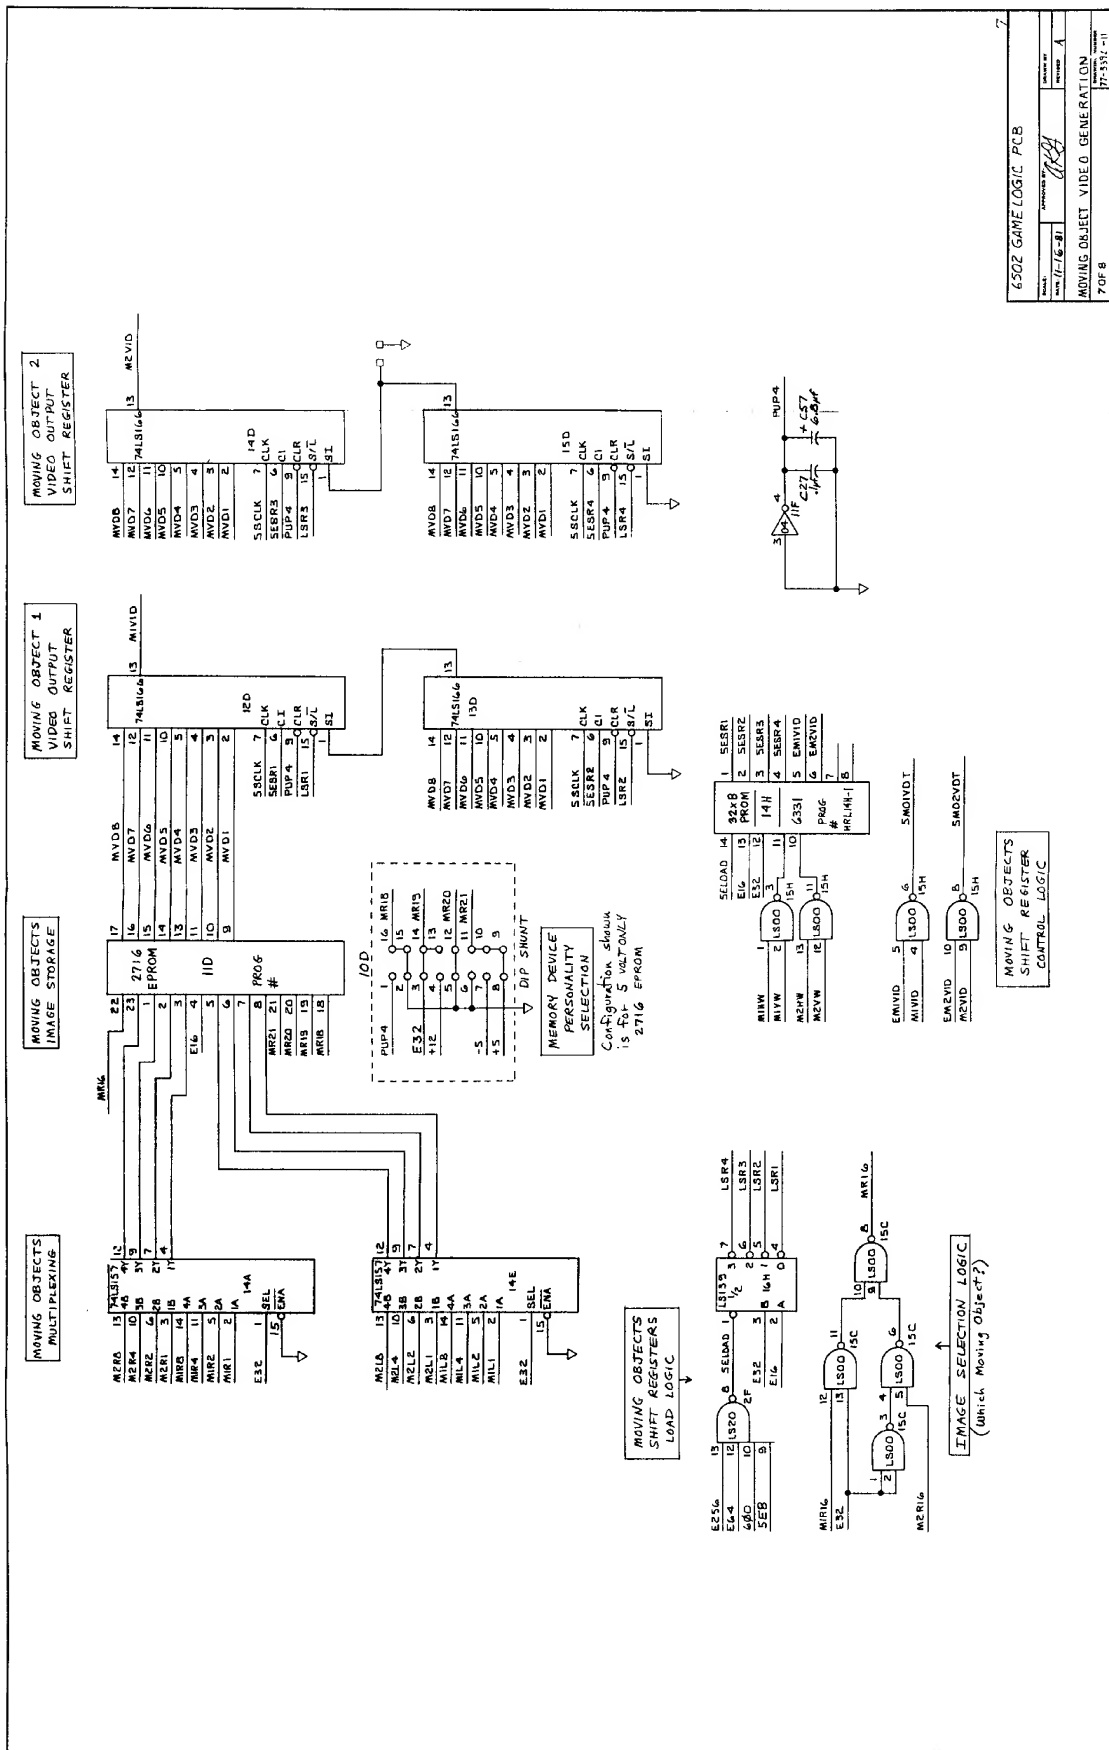

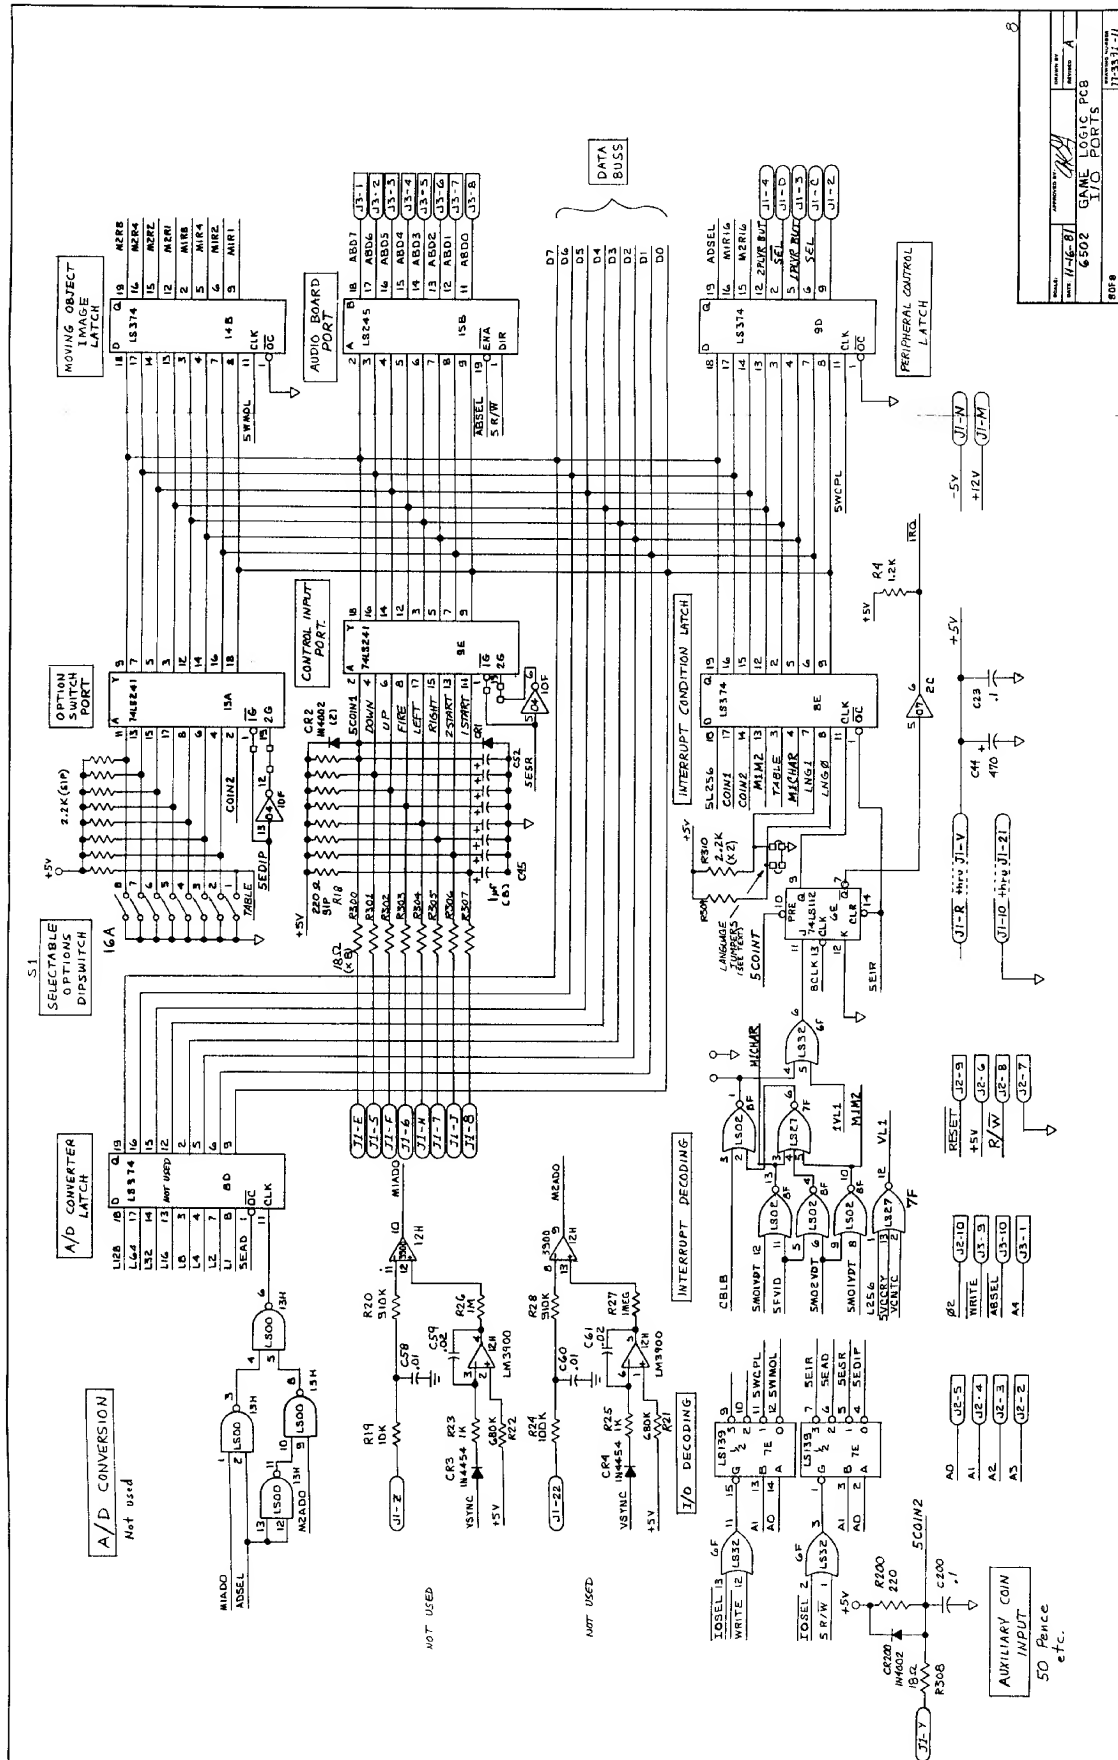

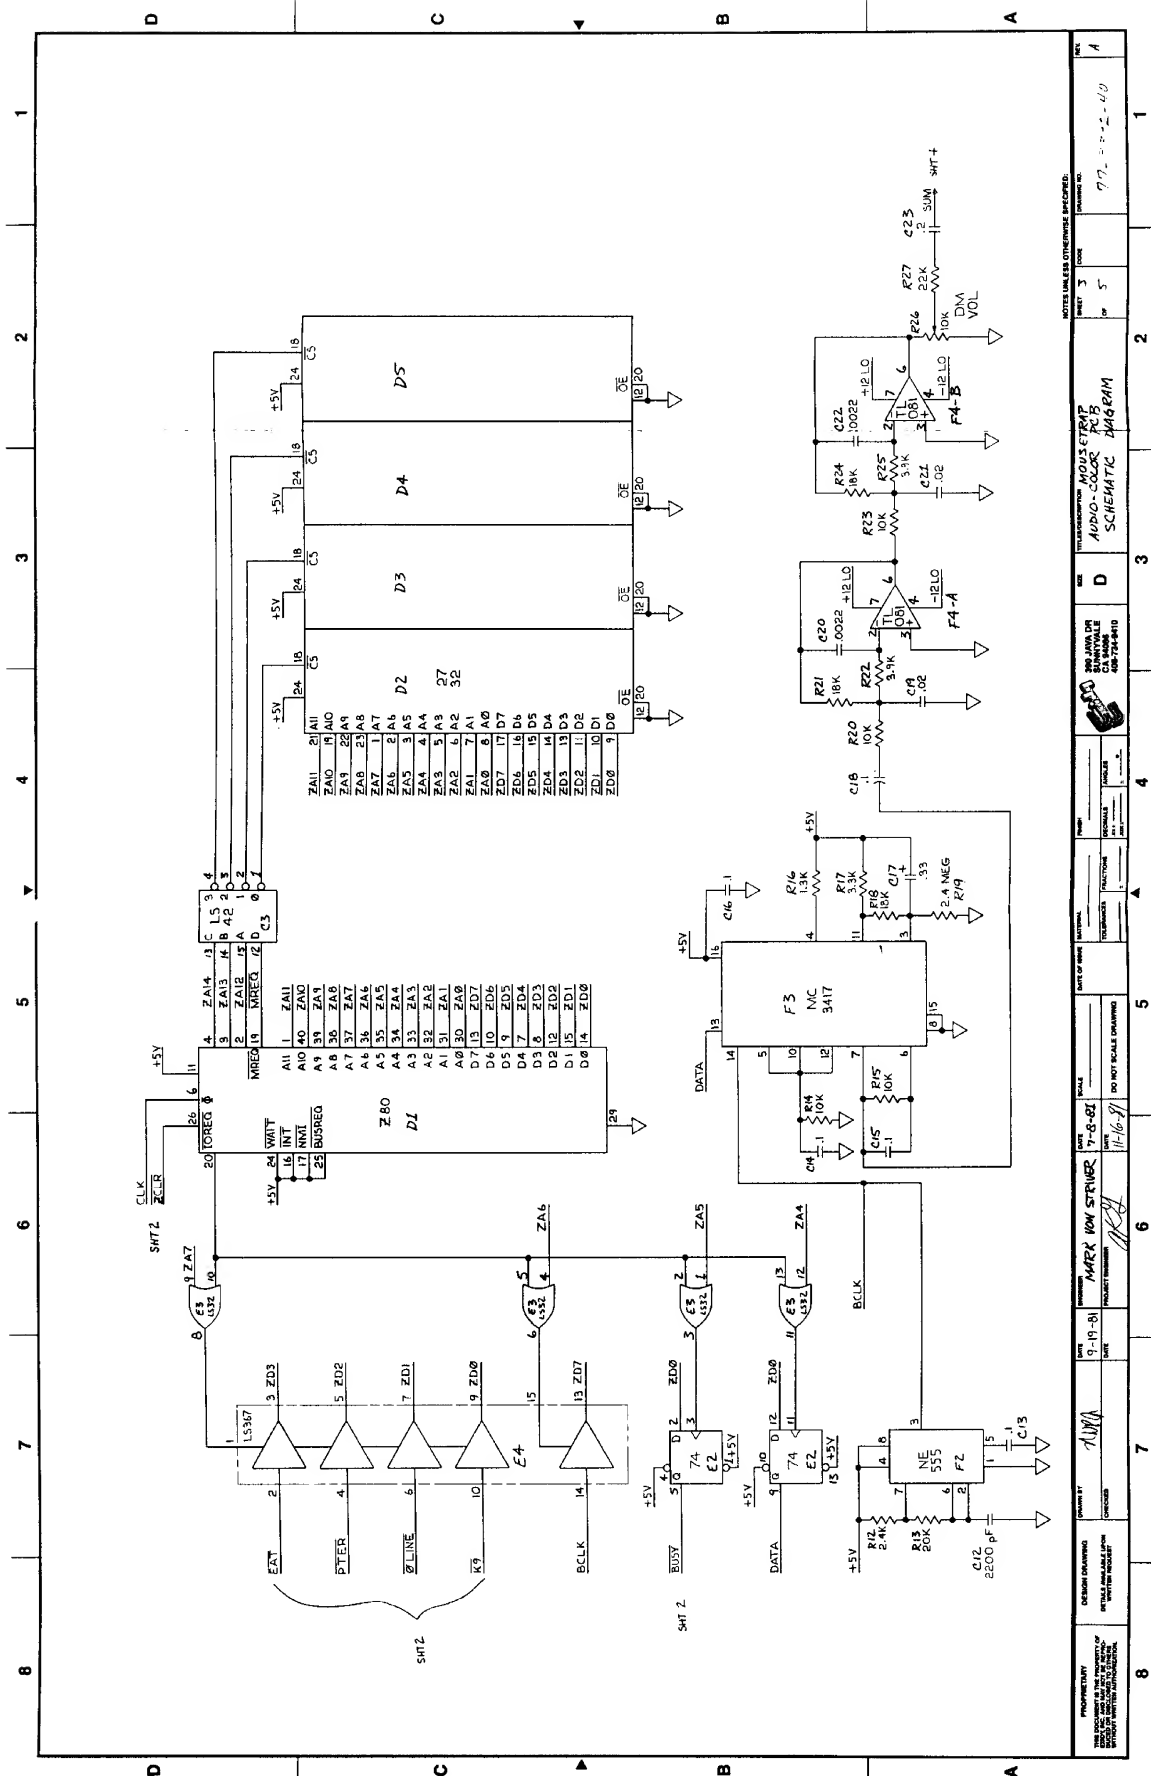

NOTES: 1. IN 1999, OTHER THAN IN 1998, 1997, 1996, 1995, 1994, 1993, 1992, 1991, 1990, 1989, 1988, 1987, 1986, 1985, 1984, 1983, 1982, 1981, 1980, 1979, 1978, 1977, 1976, 1975, 1974, 1973, 1972, 1971, 1970, 1969, 1968, 1967, 1966, 1965, 1964, 1963, 1962, 1961, 1960, 1959, 1958, 1957, 1956, 1955, 1954, 1953, 1952, 1951, 1950, 1949, 1948, 1947, 1946, 1945, 1944, 1943, 1942, 1941, 1940, 1939, 1938, 1937, 1936, 1935, 1934, 1933, 1932, 1931, 1930, 1929, 1928, 1927, 1926, 1925, 1924, 1923, 1922, 1921, 1920, 1919, 1918, 1917, 1916, 1915, 1914, 1913, 1912, 1911, 1910, 1909, 1908, 1907, 1906, 1905, 1904, 1903, 1902, 1901, 1900, 1899, 1898, 1897, 1896, 1895, 1894, 1893, 1892, 1891, 1890, 1889, 1888, 1887, 1886, 1885, 1884, 1883, 1882, 1881, 1880, 1879, 1878, 1877, 1876, 1875, 1874, 1873, 1872, 1871, 1870, 1869, 1868, 1867, 1866, 1865, 1864, 1863, 1862, 1861, 1860, 1859, 1858, 1857, 1856, 1855, 1854, 1853, 1852, 1851, 1850, 1849, 1848, 1847, 1846, 1845, 1844, 1843, 1842, 1841, 1840, 1839, 1838, 1837, 1836, 1835, 1834, 1833, 1832, 1831, 1830, 1829, 1828, 1827, 1826, 1825, 1824, 1823, 1822, 1821, 1820, 1819, 1818, 1817, 1816, 1815, 1814, 1813, 1812, 1811, 1810, 1809, 1808, 1807, 1806, 1805, 1804, 1803, 1802, 1801, 1800, 1799, 1798, 1797, 1796, 1795, 1794, 1793, 1792, 1791, 1790, 1789, 1788, 1787, 1786, 1785, 1784, 1783, 1782, 1781, 1780, 1779, 1778, 1777, 1776, 1775, 1774, 1773, 1772, 1771, 1770, 1769, 1768, 1767, 1766, 1765, 1764, 1763, 1762, 1761, 1760, 1759, 1758, 1757, 1756, 1755, 1754, 1753, 1752, 1751, 1750, 1749, 1748, 1747, 1746, 1745, 1744, 1743, 1742, 1741, 1740, 1739, 1738, 1737, 1736, 1735, 1734, 1733, 1732, 1731, 1730, 1729, 1728, 1727, 1726, 1725, 1724, 1723, 1722, 1721, 1720, 1719, 1718, 1717, 1716, 1715, 1714, 1713, 1712, 1711, 1710, 1709, 1708, 1707, 1706, 1705, 1704, 1703, 1702, 1701, 1700, 1699, 1698, 1697, 1696, 1695, 1694, 1693, 1692, 1691, 1690, 1689, 1688, 1687, 1686, 1685, 1684, 1683, 1682, 1681, 1680, 1679, 1678, 1677, 1676, 1675, 1674, 1673, 1672, 1671, 1670, 1669, 1668, 1667, 1666, 1665, 1664, 1663, 1662, 1661, 1660, 1659, 1658, 1657, 1656, 1655, 1654, 1653, 1652, 1651, 1650, 1649, 1648, 1647, 1646, 1645, 1644, 1643, 1642, 1641, 1640, 1639, 1638, 1637, 1636, 1635, 1634, 1633, 1632, 1631, 1630, 1629, 1628, 1627, 1626, 1625, 1624, 1623, 1622, 1621, 1620, 1619, 1618, 1617, 1616, 1615, 1614, 1613, 1612, 1611, 1610, 1609, 1608, 1607, 1606, 1605, 1604, 1603, 1602, 1601, 1600, 1599, 1598, 1597, 1596, 1595, 1594, 1593, 1592, 1591, 1590, 1589, 1588, 1587, 1586, 1585, 1584, 1583, 1582, 1581, 1580, 1579, 1578, 1577, 1576, 1575, 1574, 1573, 1572, 1571, 1570, 1569, 1568, 1567, 1566, 1565, 1564, 1563, 1562, 1561, 1560, 1559, 1558, 1557, 1556, 1555, 1554, 1553, 1552, 1551, 1550, 1549, 1548, 1547, 1546, 1545, 1544, 1543, 1542, 1541, 1540, 1539, 1538, 1537, 1536, 1535, 1534, 1533, 1532, 1531, 1530, 1529, 1528, 1527, 1526, 1525, 1524, 1523, 1522, 1521, 1520, 1519, 1518, 1517, 1516, 1515, 1514, 1513, 1512, 1511, 1510, 1509, 1508, 1507, 1506, 1505, 1504, 1503, 1502, 1501, 1500, 1499, 1498, 1497, 1496, 1495, 1494, 1493, 1492, 1491, 1490, 1489, 1488, 1487, 1486, 1485, 1484, 1483, 1482, 1481, 1480, 1479, 1478, 1477, 1476, 1475, 1474, 1473, 1472, 1471, 1470, 1469, 1468, 1467, 1466, 1465, 1464, 1463, 1462, 1461, 1460, 1459, 1458, 1457, 1456, 1455, 1454, 1453, 1452, 1451, 1450, 1449, 1448, 1447, 1446, 1445, 1444, 1443, 1442, 1441, 1440, 1439, 1438, 1437, 1436, 1435, 1434, 1433, 1432, 1431, 1430, 1429, 1428, 1427, 1426, 1425, 1424, 1423, 1422, 1421, 1420, 1419, 1418, 1417, 1416, 1415, 1414, 1413, 1412, 1411, 1410, 1409, 1408, 1407, 1406, 1405, 1404, 1403, 1402, 1401, 1400, 1399, 1398, 1397, 1396, 1395, 1394, 1393, 1392, 1391, 1390, 1389, 1388, 1387, 1386, 1385, 1384, 1383, 1382, 1381, 1380, 1379, 1378, 1377, 1376, 1375, 1374, 1373, 1372, 1371, 1370, 1369, 1368, 1367, 1366, 1365, 1364, 1363, 1362, 1361, 1360, 1359, 1358, 1357, 1356, 1355, 1354, 1353, 1352, 1351, 1350, 1349, 1348, 1347, 1346, 1345, 1344, 1343, 1342, 1341, 1340, 1339, 1338, 1337, 1336, 1335, 1334, 1333, 1332, 1331, 1330, 1329, 1328, 1327, 1326, 1325, 1324, 1323, 1322, 1321, 1320, 1319,

SHEET	T	COOR	DRAWING NO.
-------	---	------	-------------

NO.	DESCRIPTION	DATE	BY
1	MOUSE TRAP		
2	VIDEO-COLOR PCB		
3	SCHEMATIC DIAGRAM		

300 JAVA DR
SUNNYVALE
CA 94086
408-734-9410

REAL	FRACTIONS	DECIMALS	ANGLES
Weight			


10	DO NOT SCALE DRAWING	SCALE	DATE OF REVISION
108			

ENCLOSURE	MARK VON STRIVER
PROJECT NUMBER	1869

DATE	9-	DATE	
BY	WAY	BY	

<p>DESIGN DRAWING</p>	<p>DETAILS AVAILABLE UPON WRITTEN REQUEST</p>
<p>PROPRIETARY</p>	<p>IS THE PROPERTY OF MAY NOT BE REPRODUCED OR COPIED WITHOUT WRITTEN AUTHORIZATION</p>

TIME	EDDY	SPACE	SPIN
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			
42			
43			
44			
45			
46			
47			
48			
49			
50			
51			
52			
53			
54			
55			
56			
57			
58			
59			
60			
61			
62			
63			
64			
65			
66			
67			
68			
69			
70			
71			
72			
73			
74			
75			
76			
77			
78			
79			
80			
81			
82			
83			
84			
85			
86			
87			
88			
89			
90			
91			
92			
93			
94			
95			
96			
97			
98			
99			
100			

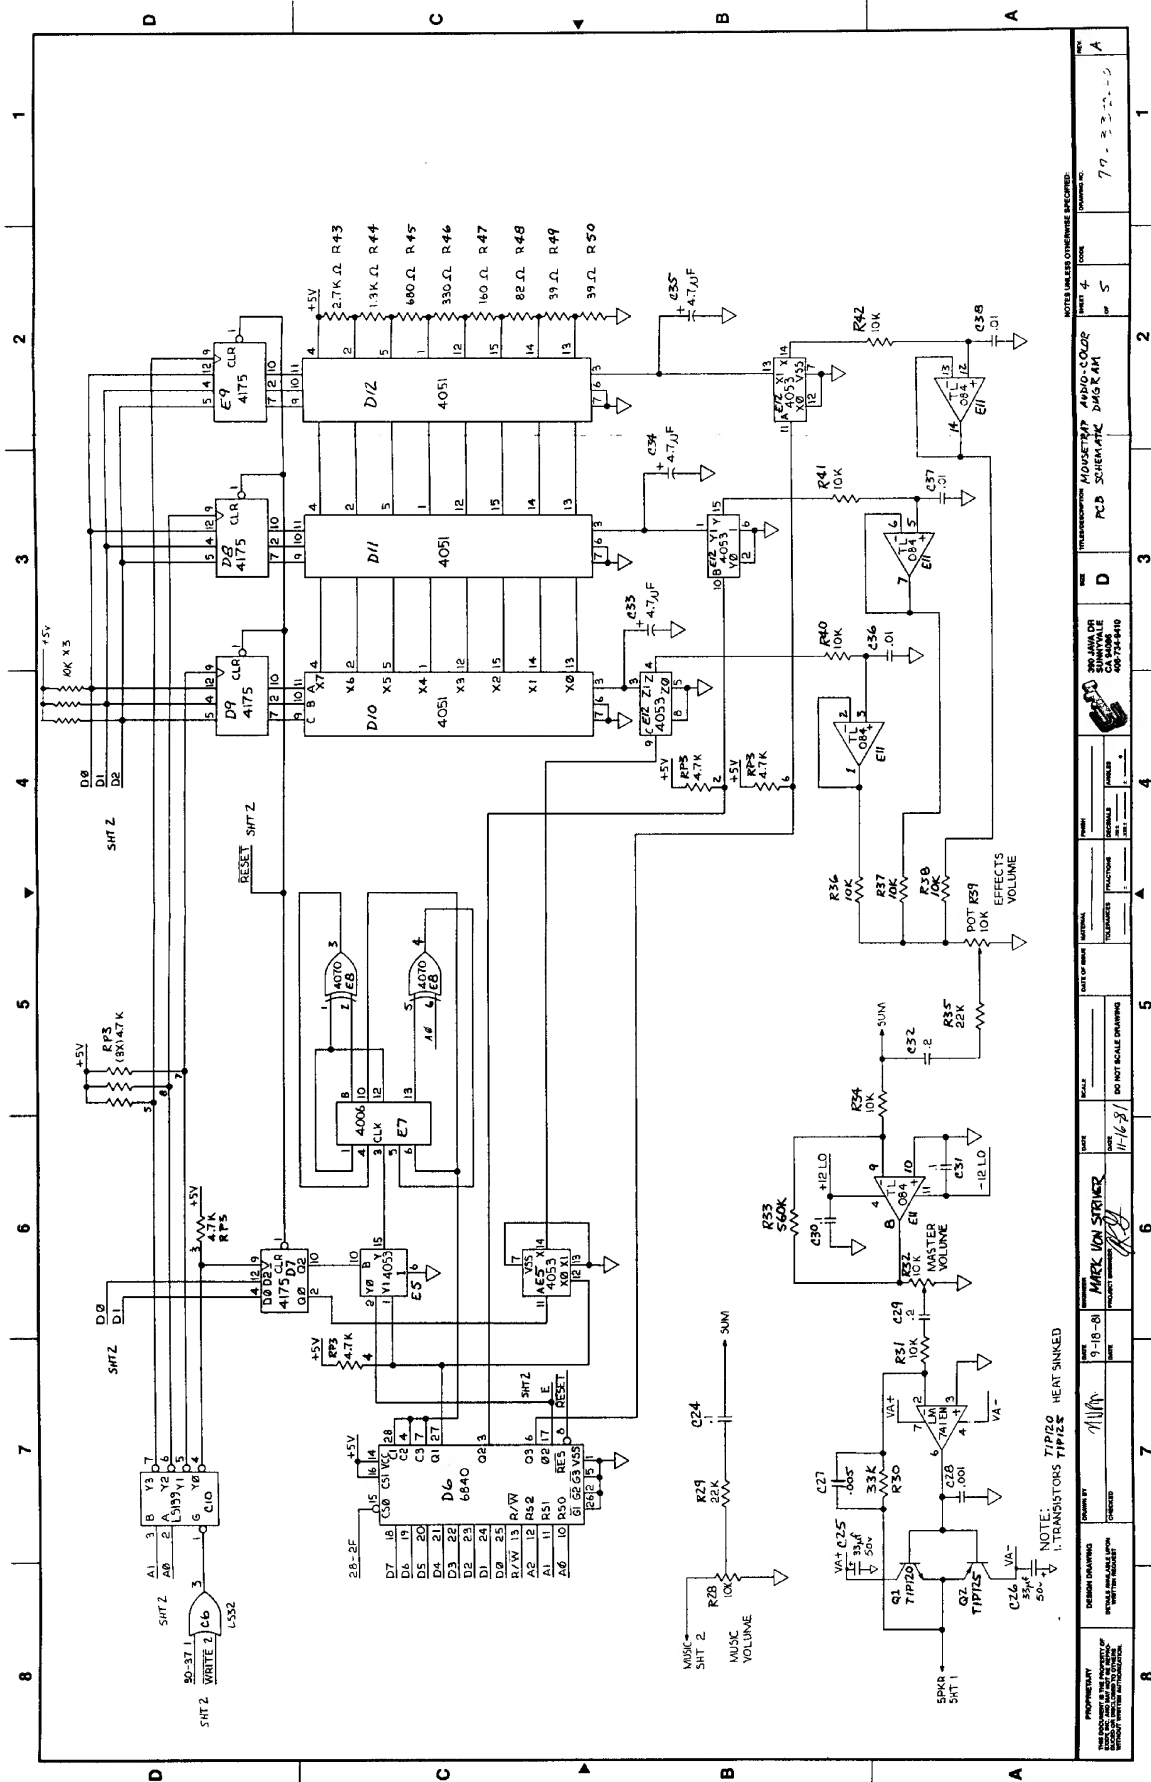

NOTE: TIP/20
1. TRANSISTORS TIP/25 HEAT SINKED


1. TRANSISTOR.

10


CHG	CHGMENTS BY
-----	-------------


1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398</
------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	--------

1

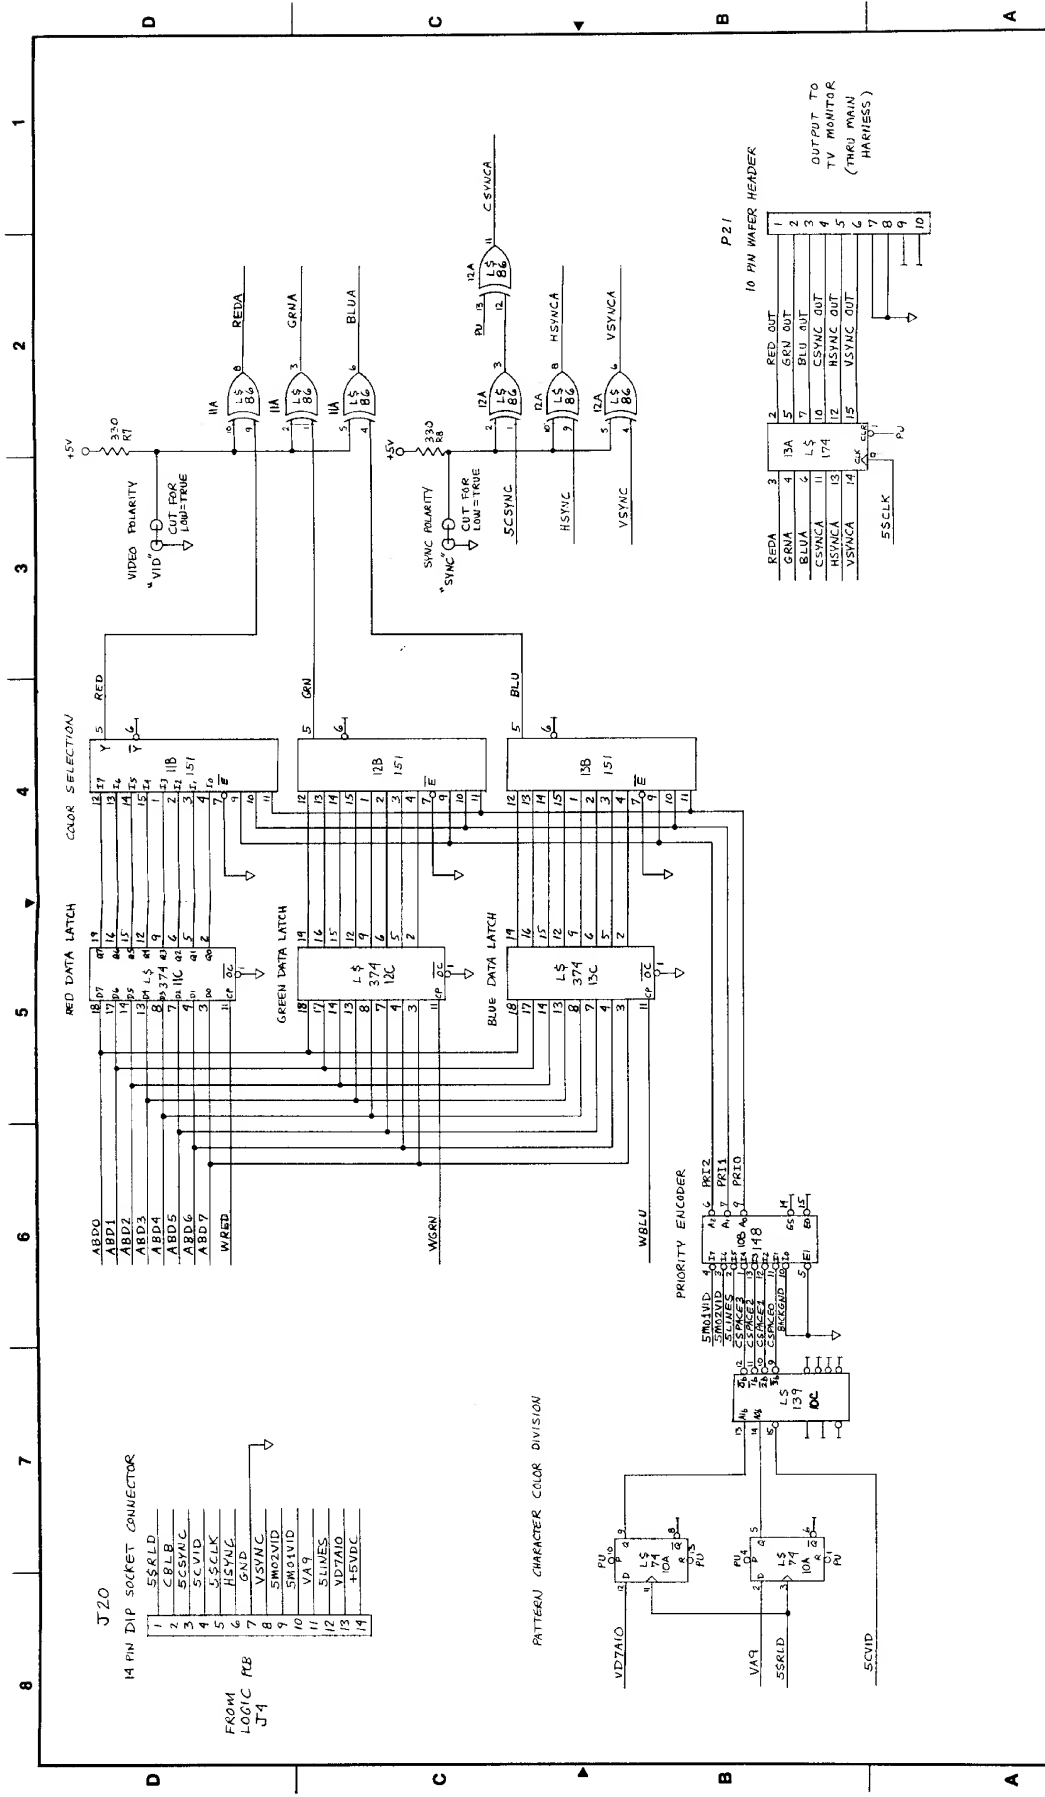


1	2	3	4	5	6	7	8
1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24
25	26	27	28	29	30	31	32
33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56
57	58	59	60	61	62	63	64
65	66	67	68	69	70	71	72
73	74	75	76	77	78	79	80
81	82	83	84	85	86	87	88
89	90	91	92	93	94	95	96
97	98	99	100	101	102	103	104
105	106	107	108	109	110	111	112
113	114	115	116	117	118	119	120
121	122	123	124	125	126	127	128
129	130	131	132	133	134	135	136
137	138	139	140	141	142	143	144
145	146	147	148	149	150	151	152
153	154	155	156	157	158	159	160
161	162	163	164	165	166	167	168
169	170	171	172	173	174	175	176
177	178	179	180	181	182	183	184
185	186	187	188	189	190	191	192
193	194	195	196	197	198	199	200
201	202	203	204	205	206	207	208
209	210	211	212	213	214	215	216
217	218	219	220	221	222	223	224
225	226	227	228	229	230	231	232
233	234	235	236	237	238	239	240
241	242	243	244	245	246	247	248
249	250	251	252	253	254	255	256
257	258	259	260	261	262	263	264
265	266	267	268	269	270	271	272
273	274	275	276	277	278	279	280
281	282	283	284	285	286	287	288
289	290	291	292	293	294	295	296
297	298	299	300	301	302	303	304
305	306	307	308	309	310	311	312
313	314	315	316	317	318	319	320
321	322	323	324	325	326	327	328
329	330	331	332	333	334	335	336
337	338	339	340	341	342	343	344
345	346	347	348	349	350	351	352
353	354	355	356	357	358	359	360
361	362	363	364	365	366	367	368
369	370	371	372	373	374	375	376
377	378	379	380	381	382	383	384
385	386	387	388	389	390	391	392
393	394	395	396	397	398	399	400
401	402	403	404	405	406	407	408
409	410	411	412	413	414	415	416
417	418	419	420	421	422	423	424
425	426	427	428	429	430	431	432
433	434	435	436	437	438	439	440
441	442	443	444	445	446	447	448
449	450	451	452	453	454	455	456
457	458	459	460	461	462	463	464
465	466	467	468	469	470	471	472
473	474	475	476	477	478	479	480
481	482	483	484	485	486	487	488
489	490	491	492	493	494	495	496
497	498	499	500	501	502	503	504
505	506	507	508	509	510	511	512
513	514	515	516	517	518	519	520
521	522	523	524	525	526	527	528
529	530	531	532	533	534	535	536
537	538	539	540	541	542	543	544
545	546	547	548	549	550	551	552
553	554	555	556	557	558	559	560
561	562	563	564	565	566	567	568
569	570	571	572	573	574	575	576
577	578	579	580	581	582	583	584
585	586	587	588	589	590	591	592
593	594	595	596	597	598	599	600
601	602	603	604	605	606	607	608
609	610	611	612	613	614	615	616
617	618	619	620	621	622	623	624
625	626	627	628	629	630	631	632
633	634	635	636	637	638	639	640
641	642	643	644	645	646	647	648
649	650	651	652	653	654	655	656
657	658	659	660	661	662	663	664
665	666	667	668	669	670	671	672
673	674	675	676	677	678	679	680
681	682	683	684	685	686	687	688
689	690	691	692	693	694	695	696
697	698	699	700	701	702	703	704
705	706	707	708	709	710	711	712
713	714	715	716	717	718	719	720
721	722	723	724	725	726	727	728
729	730	731	732	733	734	735	736
737	738	739	740	741	742	743	744
745	746	747	748	749	750	751	752
753	754	755	756	757	758	759	760
761	762	763	764	765	766	767	768
769	770	771	772	773	774	775	776
777	778	779	780	781	782	783	784
785	786	787	788	789	790	791	792
793	794	795	796	797	798	799	800
801	802	803	804	805	806	807	808
809	810	811	812	813	814	815	816
817	818	819	820	821	822	823	824
825	826	827	828	829	830	831	832
833	834	835	836	837	838	839	840
841	842	843	844	845	846	847	848
849	850	851	852	853	854	855	856
857	858	859	860	861	862	863	864
865	866	867	868	869	870	871	872
873	874	875	876	877	878	879	880
881	882	883	884	885	886	887	888
889	890	891	892	893	894	895	896
897	898	899	900	901	902	903	904
905	906	907	908	909	910	911	912
913	914	915	916	917	918	919	920
921	922	923	924	925	926	927	928
929	930	931	932	933	934	935	936
937	938	939	940	941	942	943	944
945	946	947	948	949	950	951	952
953	954	955	956	957	958	959	960
961	962	963	964	965	966	967	968
969	970	971	972	973	974	975	976
977	978	979	980	981	982	983	984
985	986	987	988	989	990	991	992
993	994	995	996	997	998	999	1000

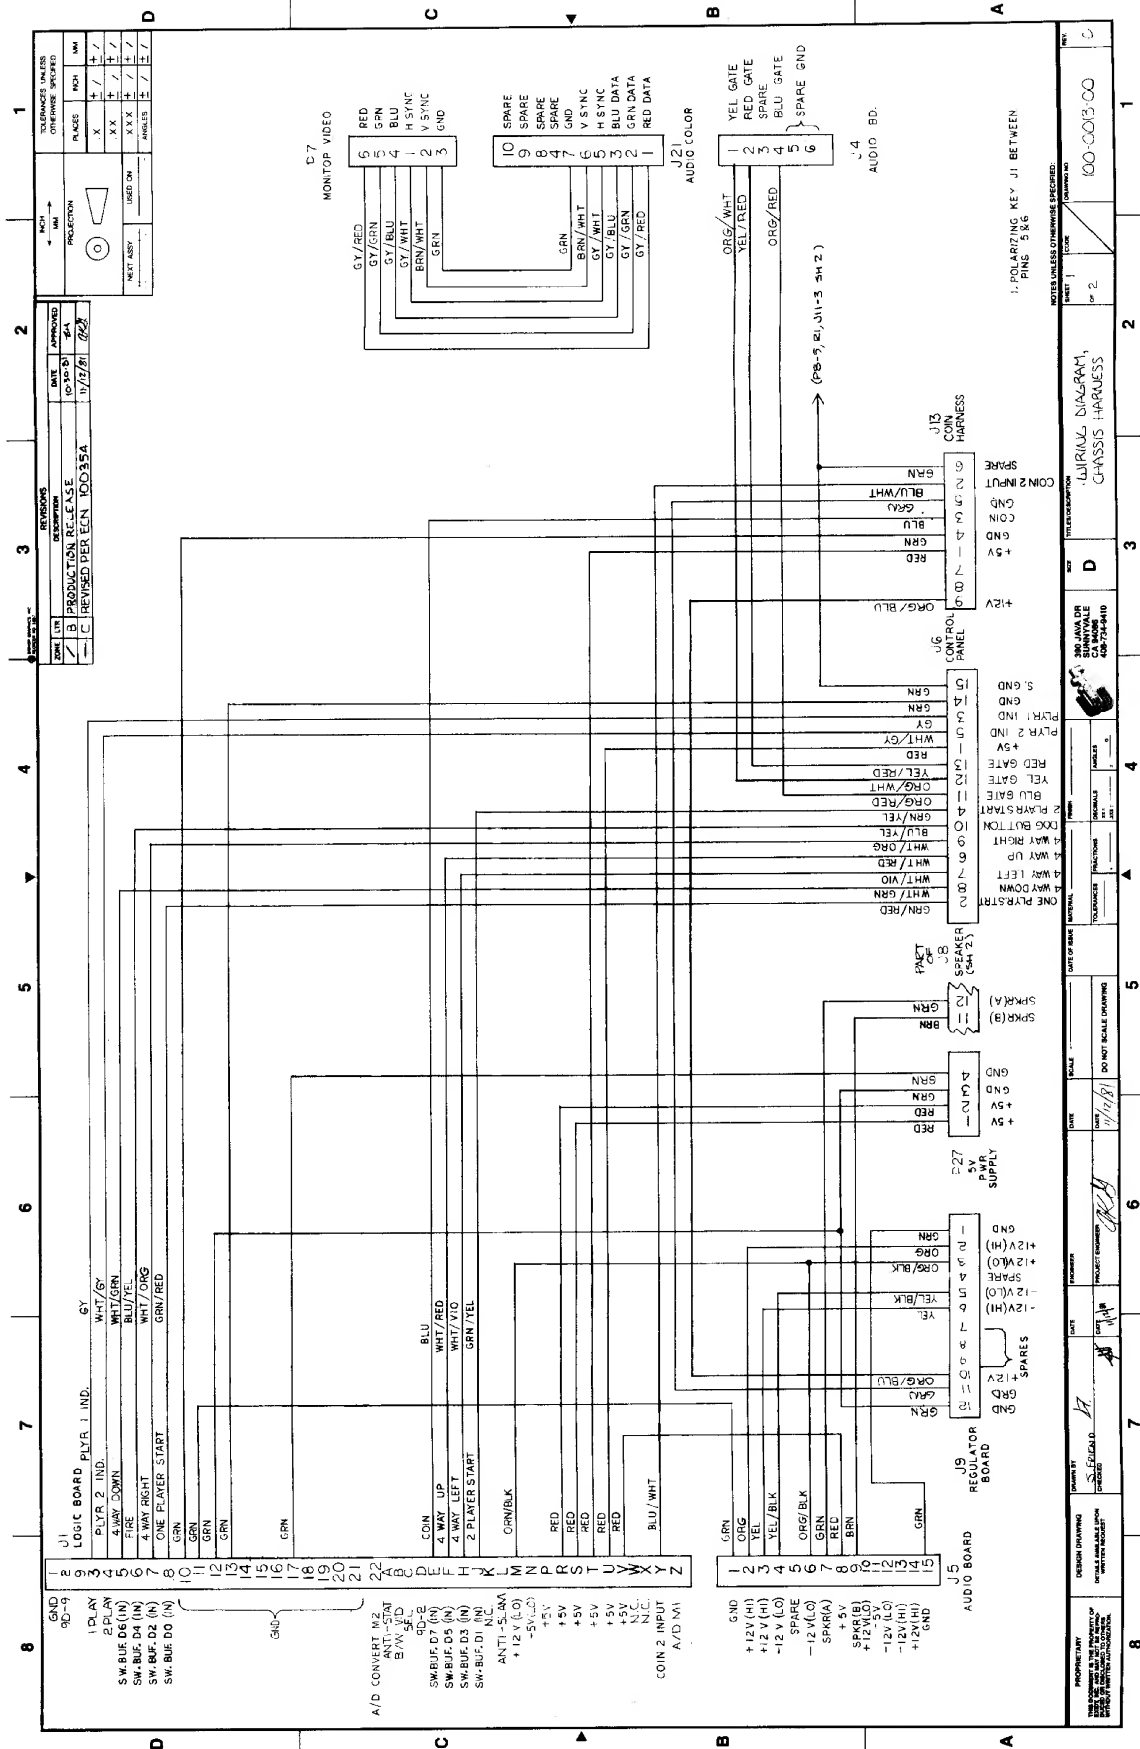

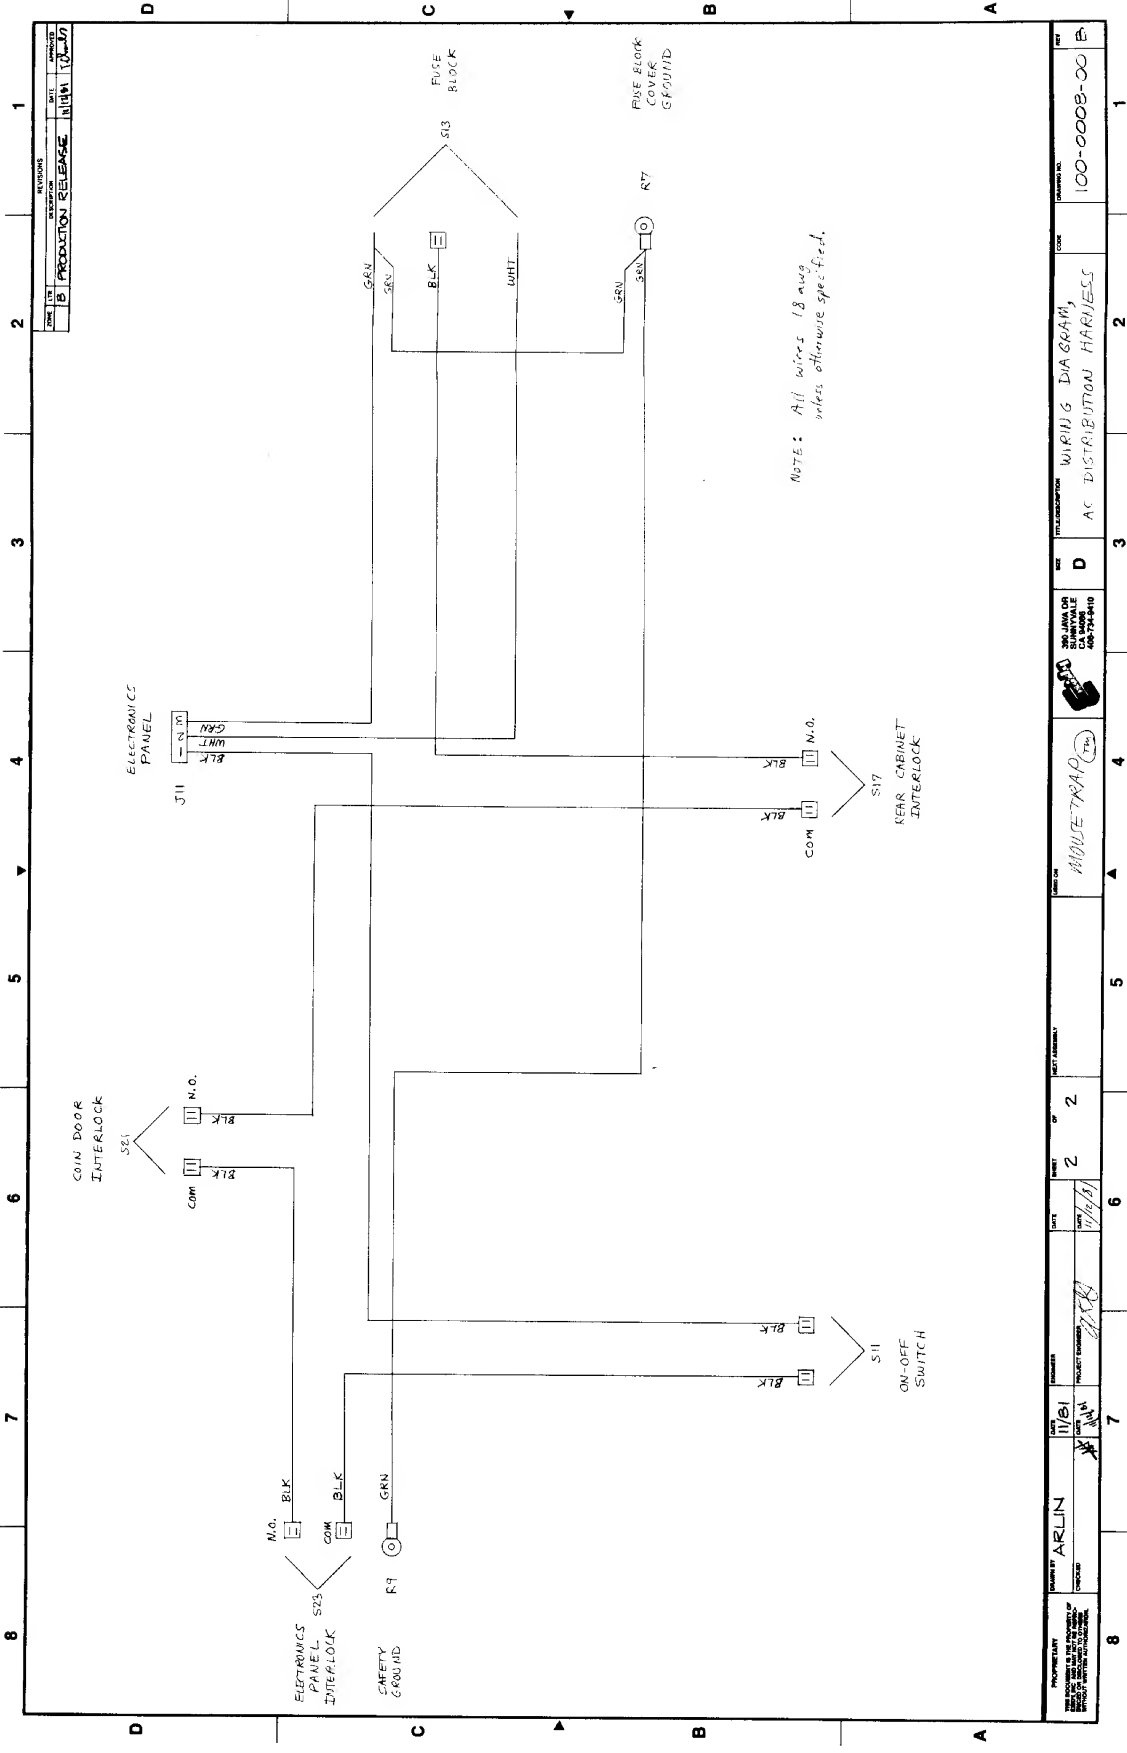



PROJECT NAME ARLIN		DATE 11/81		PROJECT NUMBER 11/81		SHEET 2		OF 2		NEXT ASSEMBLY 11/81		DRAWN BY MOULTE-TRAP		CHECKED BY MOULTE-TRAP		TITLE WIRING DIAGRAM, AC DISTRIBUTION HARNESS		PART NUMBER 100-0008-00	
PREPARED BY ARLIN		DATE 11/81		PROJECT NUMBER 11/81		SHEET 2		OF 2		NEXT ASSEMBLY 11/81		DRAWN BY MOULTE-TRAP		CHECKED BY MOULTE-TRAP		TITLE WIRING DIAGRAM, AC DISTRIBUTION HARNESS		PART NUMBER 100-0008-00	

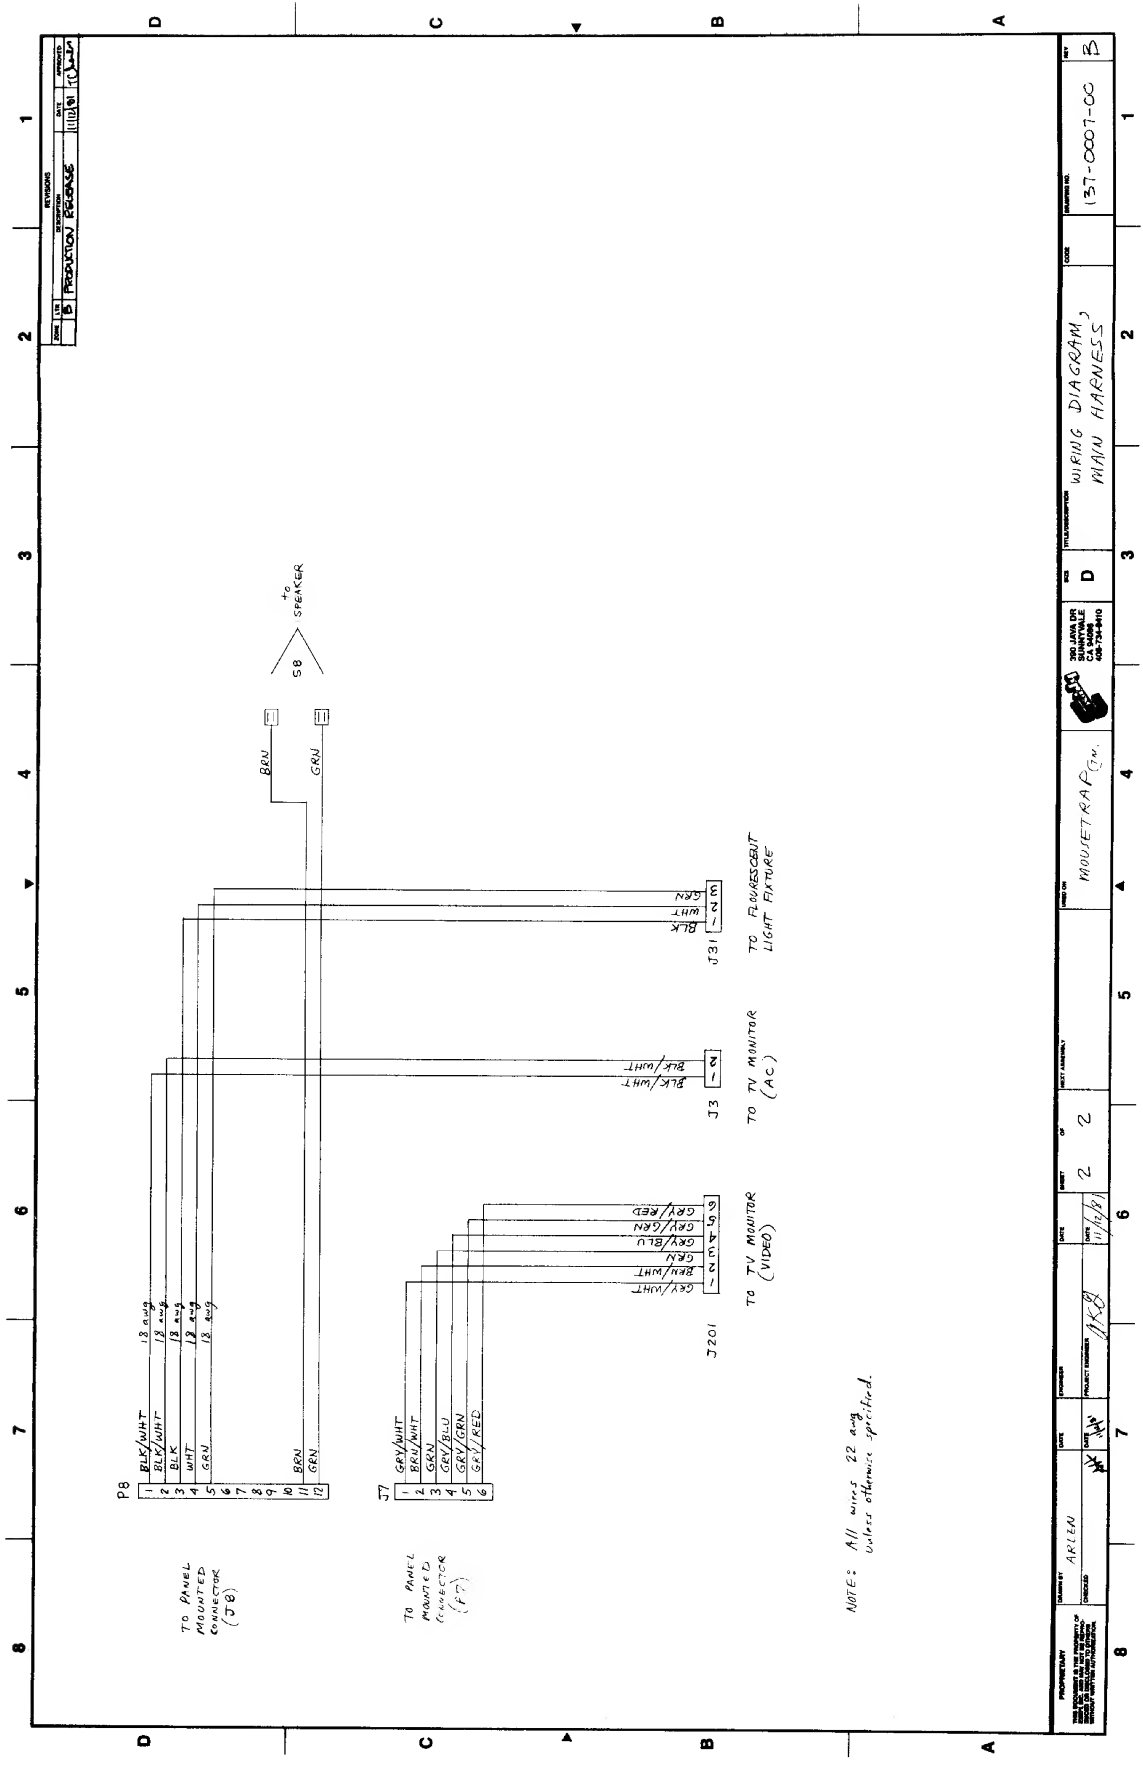

NOTE: All wires 22 AWG unless otherwise specified.

PROJECT NAME	AKLEN	DATE	1/1/81	PROJECT NUMBER	AK8	DATE	1/1/81	PROJECT NAME	AKLEN	DATE	1/1/81	PROJECT NUMBER	AK8	DATE	1/1/81
<p>TO PANEL MOUNTED CONNECTOR (J8)</p> <p>TO TV MONITOR (VIDEO) J201</p> <p>TO TV MONITOR (AC) J3</p> <p>TO FLUORESCENT LIGHT FIXTURE J31</p> <p>TO SPEAKER</p>															
<p>WIRING DIAGRAM, MAIN HARNESS</p>															
<p>137-0007-00 B</p>															

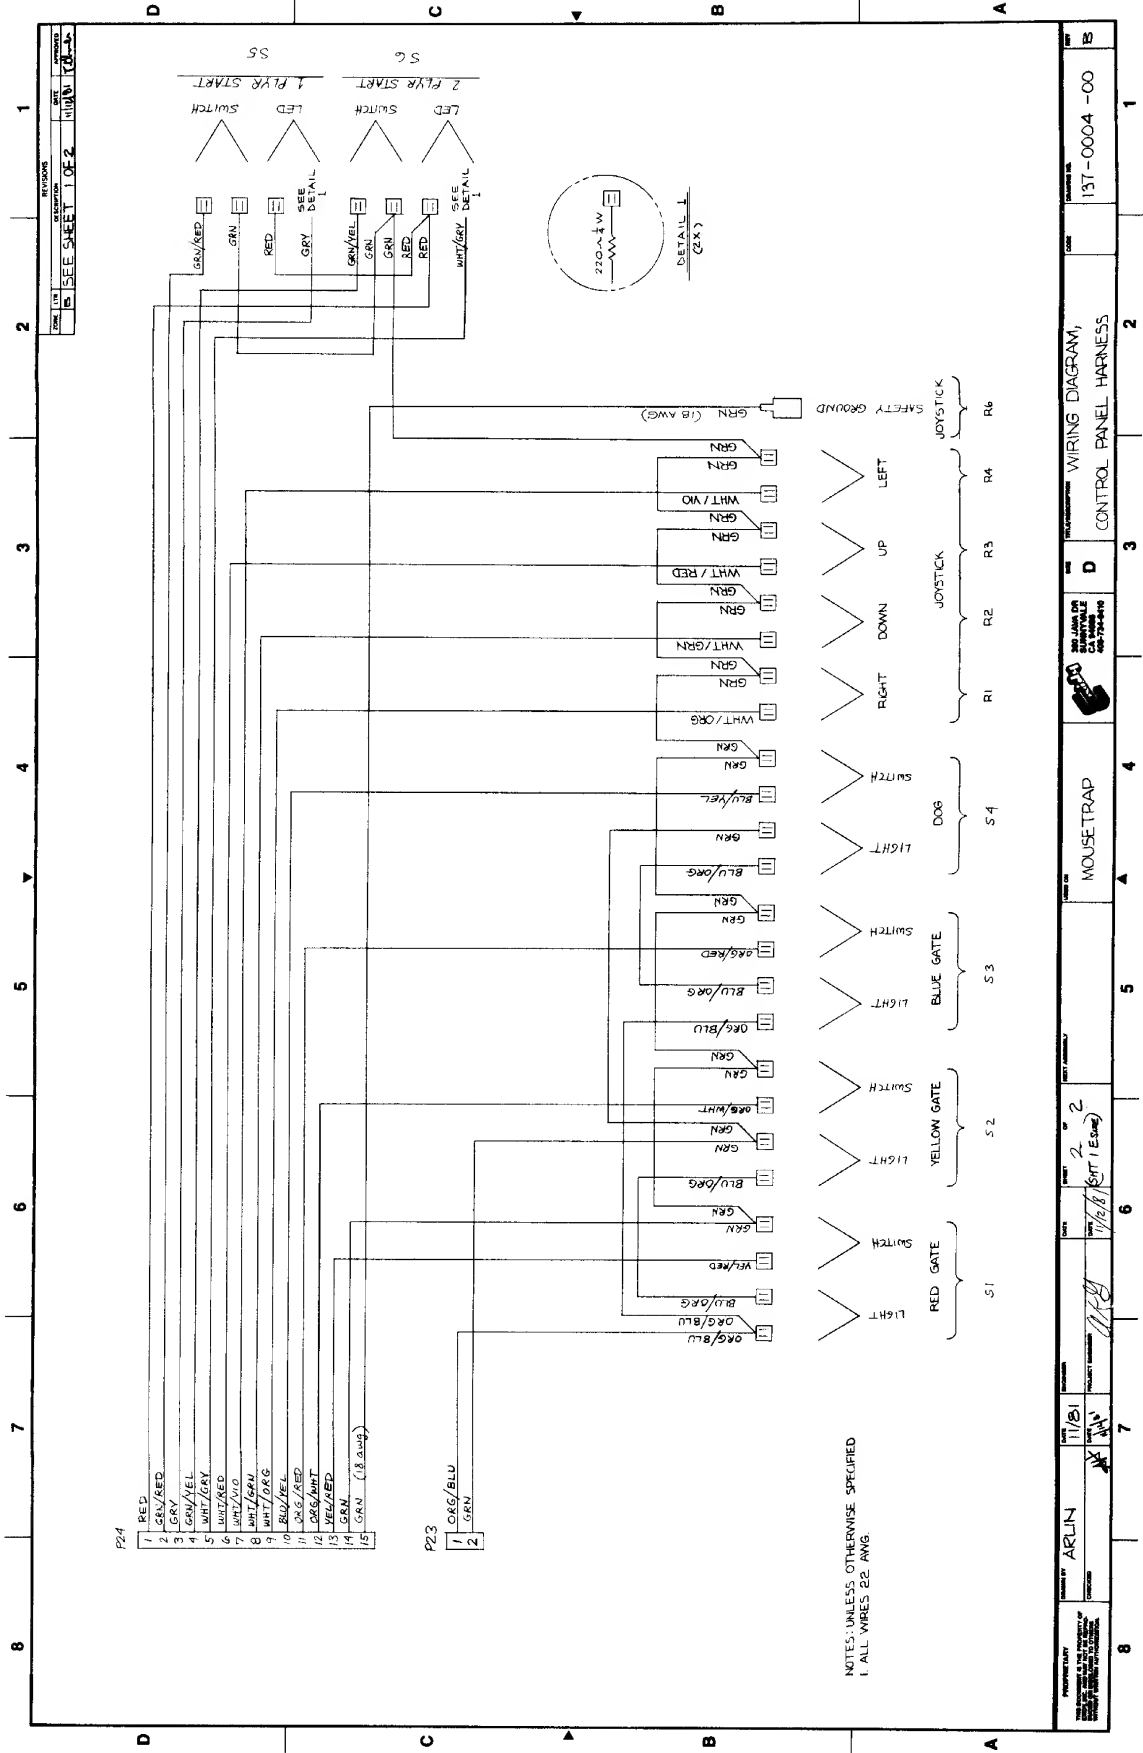

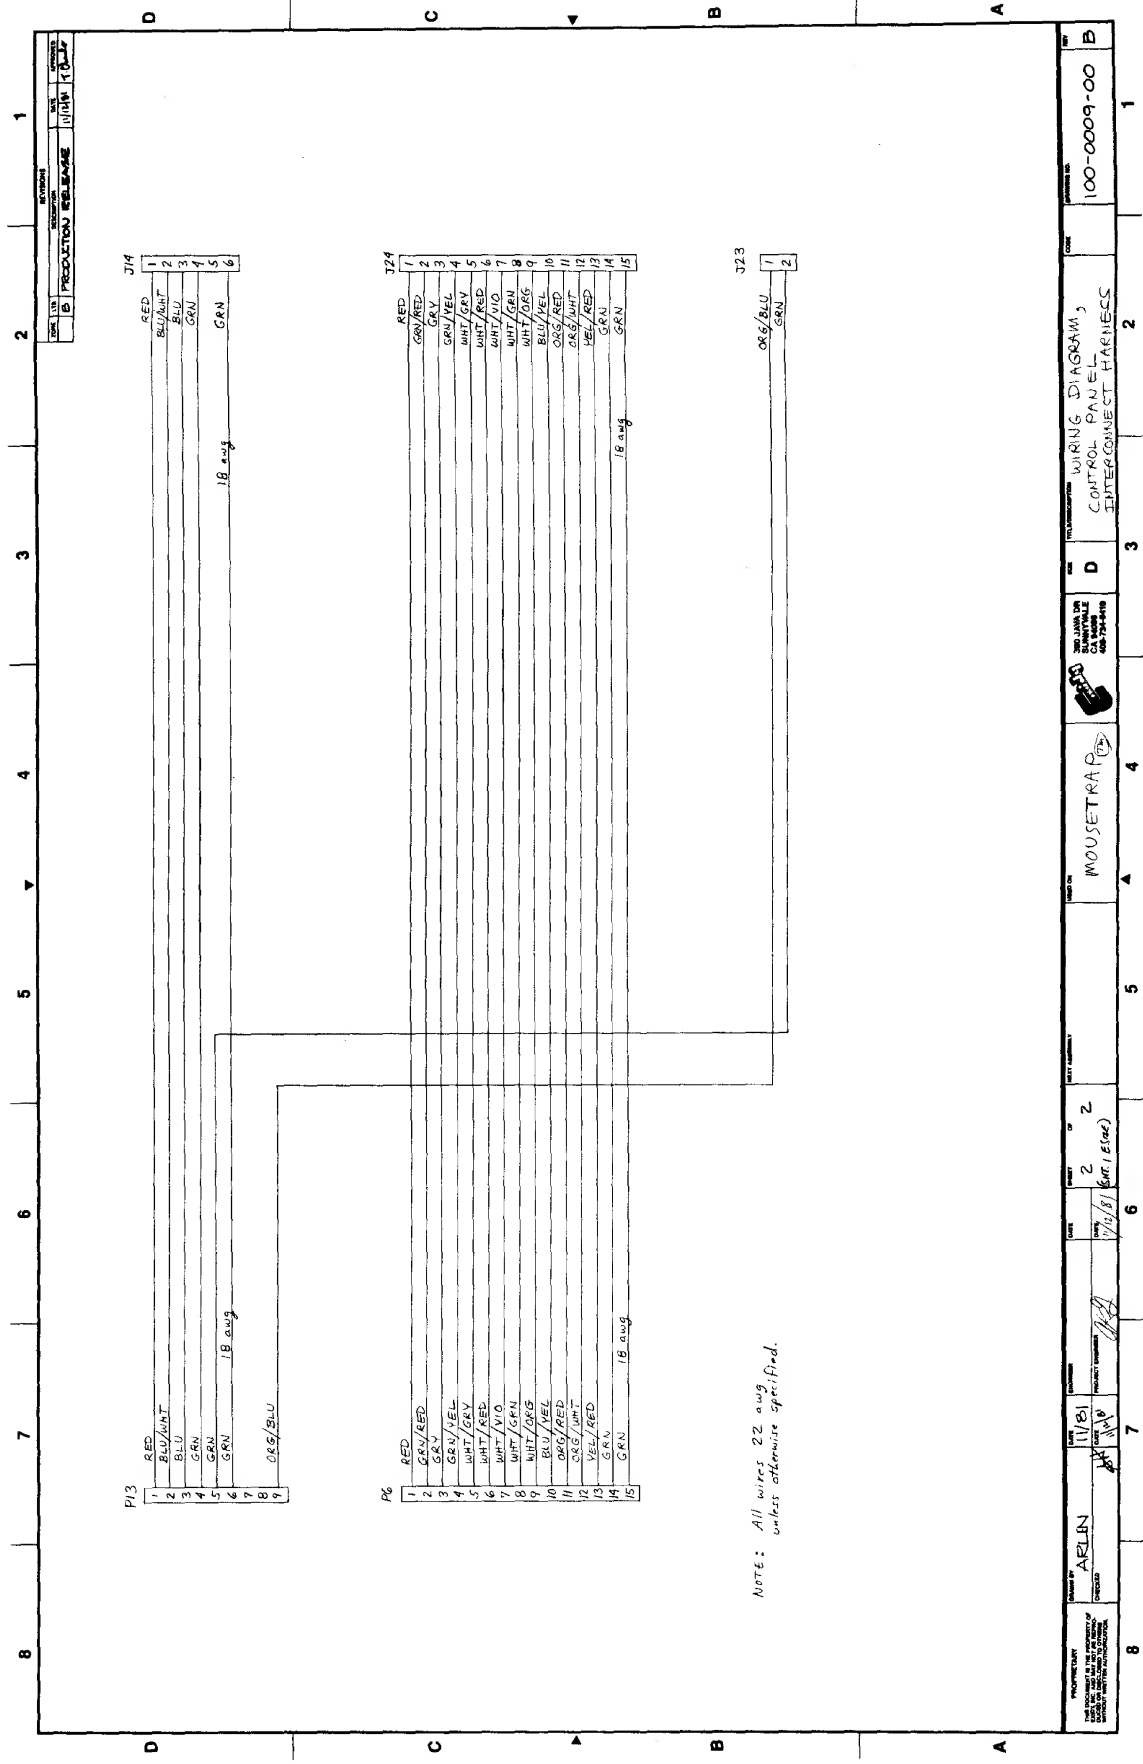

PREPARED BY: ARLIN CHECKED: [Signature]		DATE: 11/21/81 TIME: 11:00	DRAWN BY: [Signature] DATE: 11/21/81	PART NUMBER: 2 QUANTITY: 2	PART NAME: MOUSETRAP	PART NUMBER: 2 QUANTITY: 2	PART NAME: WIRING DIAGRAM, CONTROL PANEL INTERCONNECT HARNESS	PART NUMBER: 100-0009-00 QUANTITY: 1
--	--	-------------------------------	---	-------------------------------	----------------------	-------------------------------	---	---